



Ministry of Infrastructure
and Water Management

HGV Charge TSP

**Message description
data exchange RDW**

Appendix to Service Description

Reading guide

This document, Message Description Data Exchange RDW, describes the message specifications provided to the Toll Service Provider (TSP) for the purpose of data exchange between TSP and Toll Charger (TC). This document is aimed to provide information to the Main Service Provider (MSP) as well as European Electronic Toll System (EETS) Providers. In this document both MSP and EETS provider will be referred to as TSP, unless a clear distinction is necessary.

Data exchange between TSP and TC will be needed at several points in the Heavy Goods Vehicle (HGV) Charge chain. Message specifications for the data exchanges are defined in the standards EN 16968:2024 and ISO 12855:2022. The EN 16986:2024 standard defines a coherent set of transactions, triggers, conditions, data elements, transfer mechanisms and support functions for an interoperable data exchange between the central systems of TC and TSP, based on ISO 12855:2022.

The “Anonymous movement data” exchange is the only exchange that is not part of the ISO 12855:2022.

The EN 16986:2024 defines different profiles with specific usage for certain transactions. For the Dutch HGV Charge the SectionAutonomous profile is applicable, since tolling is executed by means of autonomous positioning recognition (GNSS) for travelling in identified areas (road sections), with the TSP playing the dominant role.

This document contains a detailed specification of each message. For more general information on the usage of each operation, please refer to document ‘HGV Charge – TSP – Service description data exchange RDW.’

Although all data exchanges in this document will technically be transferred through InfoExchange messages, in this document they will be referred to by its content. E.g. an InfoExchange message containing a BillingDetailsADU will often be referred to as a Billing Details message. This is done for reading purposes in order to have a clear distinction between the different messages in this document.

This document reflects the current state of the message description and is intended to inform the reader into detail on specifications and processing for each interaction. It is however possible that changes to this specification will be made during the realisation phase of HGV Charge project. In the event that there is a discrepancy between this document and the XSD files, the XSD files are leading and will take precedence over this document.

¹ At the time of writing, a new 2024 version of EN 16986 is in the process of ratification. It is expected that this ratification will be concluded within the timescales of this project.



Change history

Version	Paragraph	Description
17-Jan-2024	-	Initial version
06-Mar-2024	2.2.1, 3	Definition of 'Toll trip' is further specified
27-Mar-2024	2.10.2	Data item listOfCccContainers is removed from Toll Declaration message
25-Apr-2024	2.3.1	Maximum length of 32 characters is added for data item paymentReference
	2.3.3	Validation for paymentReference length (PAAdu.F7) is removed. Changes made to validation PAREC.F4. Validation PAREC.F5 is added.
	2.4.1	Data item entryValidityEnd is added. Value 'whitelistIncremental (12) is added for data item exceptionListType. Data item vehicleTechnicalPermissibleMaxLadenMass is removed (simpleType vehicleTechnicalPermissibleMaxLadenMasses must be used)
	2.4.3	Validations for entryValidityStart and entryValidityEnd are added
	2.5.1	Data item entryValidityEnd is added to Exception List (blacklist) message
	2.5.3	Minor updates, validations for entryValidityEnd are added
	2.8.1	Data item tollContextPartitionId is removed (twice, simpleTypes tollContextPartitions and applicablePartitions must be used)
	2.9.3	Validations for Trust Objects are added
	2.11.1	Data item userParameterRequest is removed (simpleType listOfParametersRequested must be used)
	3	Definition of a toll trip is extended
23-May-2024		New layout and textual corrections



Table of content

Reading guide	2
Change history	3
1 General requirements for data exchange	5
1.1 General	6
1.2 Norms	6
1.3 Message definition	6
1.4 General requirements	7
1.5 Data type restrictions	7
1.6 XSD files	8
1.7 Basis protocol	8
1.8 Message structure – InfoExchange data items	9
1.9 Error handling	10
2 Interactions and messages	11
2.1 General	12
2.2 Data Exchange “Billing details”	13
2.3 Data exchange “Payment announcement”	16
2.4 Data exchange “Exception list (whitelist)”	19
2.5 Data exchange “Exception list (blacklist)”	23
2.6 Data exchange “Report abnormal OBE”	27
2.7 Data exchange “Anonymous movement data”	28
2.8 Data exchange “Efc Context Data”	29
2.9 Data exchange “Trust object”	35
2.10 Data exchange “Request for Toll Declaration”	38
2.11 Data exchange “Request for User Details”	43
List of definitions and abbreviations	52
Annex A - Example of a geojson file	53



1 General requirements for data exchange

This chapter describes the general functionality that is necessary for implementing a data exchange between TSP and TC. Subjects such as applicable norms, data type restrictions, basis protocol, error handling and general data items of an InfoExchange message.



1.1 General

TC and TSP use the InfoExchange for requests and confirmations. All data transmissions shall comply with the defined InfoExchange message specification in section 1.6.

The confirmation messages of ISO 12855 (e.g. InfoExchange with AckADU) are used to confirm or refuse the contents and functional correctness of the data at the application level.

A protocol for the transmission and acknowledgment of the individual messages will be provided by the underlying transport layer. The transport layer also provides functionality to ensure data confidentiality (encryption), integrity and authenticity (signature) of the messages.

Xmldsig signature checking is added and used by RDW instead of the standard ISO signing.

1.2 Norms

The interface for data exchange must meet the following norms:

- W3C WS-* norm
- ISO 12855:2022 and EN 16986:2024
- X509 v3 certificates
- “XML Signature Syntax and Processing Version 2.0”, www.w3.org/2000/09/xmldsig
- “Canonicalization algorithm”, www.w3.org/2001/10/xml-exc-c14n#
- “Signature algorithm”, www.w3.org/2001/04/xmldsig-more#rsa-sha256
- “Enveloped signature type”, www.w3.org/2000/09/xmldsig#enveloped-signature
- “Digest (hash) algorithm”, www.w3.org/2001/04/xmlenc#sha256

1.3 Message definition

The tables in this section define the use of InfoExchange with the associated ADUs in accordance with ISO 12855. The semantics of the data elements are applicable as defined in ISO 12855 and are not repeated in this document. The restrictions and transaction definitions of EN 16986 are complied with whenever possible.

The column “Seq” in the tables describes the sequence (or order) of data items in a message.

The column “Qty” provides information about the frequency of attributes. In addition, attributes according to the mentioned standards that are not used in the HGV Charge context are not in this document. In summary, this means:

- 0 = optional data item can be transferred, but is not mandatory
- 1 = data item shall be transmitted, exactly one data item shall be transmitted
- 0..n = none or at most n data items can be transferred,
- 1..n = at least 1 and at most n data items can be transferred.

The column “Lvl” in the tables describes the level of data items within the hierarchy of a message.

The column “Value” in the tables contains if necessary:

- The detailed value range of the type attributes. The value range or assignment of values are given in decimal numeral system unless otherwise explicitly stated.
- Additional restrictions of the type attributes.
- Deviating definitions of the attributes compared to the standard ISO 12855, EN ISO 17575-1 and EN 16986 are denoted by Top-Up.
- Additional descriptions of the type attributes.



The rows in the tables in section 2 are highlighted using the following rules and colour codes to provide a better overview and give some additional information:

- attributes to be transmitted are highlighted by noting these against white background
- attributes according to standards to be submitted but not used are highlighted against orange background
- and attributes and/or attribute values that are Top-Up to standards are highlighted against green background

1.4 General requirements

The PAN (pan = personal account number from userId for a service user) shall be the unique vehicle identifier for a (chargeable) toll trip. During a toll trip the userId, the combination of pan, obeld and licencePlateNumber shall not change.

1.5 Data type restrictions

For data elements that have not been otherwise restricted in terms of scope or format, the following restrictions apply:

- In the ASN.1 definition unlimited INTEGER shall not exceed the maximum value $2^{63}-1$. For some data elements a specific maximum value is specified. The ASN.1 INTEGER type is converted into one of several XSD built-in types depending on value range constraints on the integer type definition.

If the integer has a value range constraint that allows a more restrictive XSD type to be used, then that type will be used. For example, if a range of 0 to 255 (inclusive) is specified, an XSD unsignedByte would be used because it maps exactly to this range. The following table shows the range values for each of the INTEGER type mappings:

Lower bound	Upper bound	XSD data type	Negative values
-128	127	byte	Yes
0	255	unsignedByte or Int1Unsigned	No
-32768	32767	short	Yes
0	65535	unsignedShort or Int2Unsigned	No
-2147483648	2147483647	Integer or int	Yes
0	4294967295	unsignedInt	No
-9223372036854775808	9223372036854775807	long	Yes
0	18446744073709551615	unsignedLong	No

- For some data elements, there may be a more strict limitation of the value range. The specification of these limitations can be found in the XSD files.
- In the ASN.1 definition of non-limited types "UTF8String" or "OCTET STRING" shall not include more than 1024 characters or octets. For some attributes a longer value is however allowed; if applicable, this will be mentioned for each specific attribute in this document.
- All time data elements without a time base defined shall be in coordinated universal time (UTC).



- Data elements of the type GeneralizedTime (DateTime) shall have, according to ISO/IEC 8824-1, section 46.3, the format b) with a resolution of one second and shall be in coordinated universal time.

1.6 XSD files


The TC will provide a complete set of XSD files to TSP. This set of XSD files starts with the ISO 12855 module and includes

- all required definitions from EN 16986,
- all Top-Up definitions from the current document,
- and all required sub modules. The XSD files have been generated from of the following ASN.1 files:
 - ISO12855(2021)EfcInfoExchangeV5.asn
 - ISO17573-3(2023)EfcDataDictionaryV1.3.asn
 - ISO12813(2022)EfcCccV5.asn
 - ISO13141(2023)EfcLac2.1.asn.unused
 - ISO13141(2023)EfcLacV3.asn
 - ISO14816(2015)AVIAEINumberingAndDataStructures.asn
 - ISO14906(2023)GenericV10.asn
 - ISO14906(2023)ApplicationV9.asn
 - a custom ASN.1 file containing the added elements of EN 16986 and the Top-up elements

The provided XSD files will contain enumeration and value range restrictions defined in the current document. In the event that there is a discrepancy between this document and the XSD files, the XSD files are leading and will take precedence over this document.

1.7 Basis protocol

The basic protocol is based on the InfoExchange from ISO 12855 and shown below. For Adus only the variants required for the Dutch HGV Charge interface are listed.

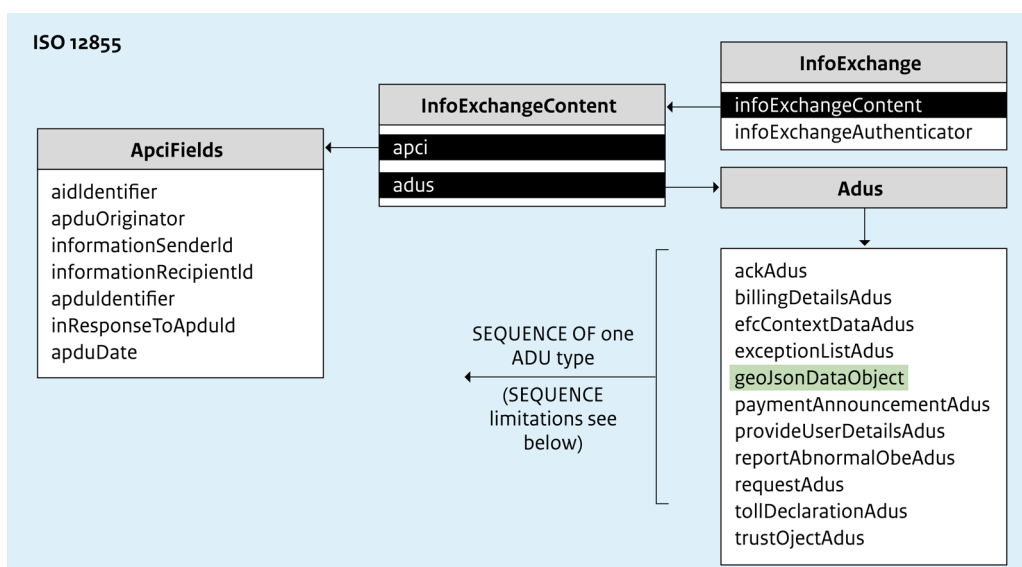

An InfoExchange shall contain a SEQUENCE OF with only one single ADU; with the exception for messages:

- billingDetails
- paymentAnnouncement
- provideUserDetails
- tollDeclaration

For more details about the `geoJsonObject`, please refer to: 2.10.2 Specification “TollDeclarationADU” and 2.10.7.1 Specification “geojson” (as part of a Toll declaration).

1.8 Message structure – InfoExchange data items

All exchanged messages are transmitted with the InfoExchange as defined below.

Seq	Qty	Lvl	Data item	Type	Value
1	1	0	infoExchange		
2	1	1	infoExchangeContent		
3	1	2	apci		
4	1	3	aidIdentifier	unsignedByte	Value: cen16986x2022 (17) Date “2022” potentially to be adjusted
5	1	3	apduOriginator		
6	1	4	countryCode	Bitstring 10	
7	1	4	providerIdentifier	unsignedShort	
8	1	3	informationSenderID		
9	1	4	countryCode	Bitstring 10	
10	1	4	providerIdentifier	unsignedShort	
11	1	3	informationRecipientID		
12	1	4	countryCode	Bitstring 10	
13	1	4	providerIdentifier	unsignedShort	
14	1	3	apduIdentifier	unsignedLong	
15	0	3	inResponseToApduId		
16	1	4	apduOriginator		
17	1	5	countryCode	Bitstring 10	
18	1	5	providerIdentifier	unsignedShort	
19	1	4	apduIdentifier	unsignedLong	
20	1	3	apduDate	DateTime	
21	1..n	2	adus Containing the ADU content		
			This data item will be following the ‘adus’ data item:		
+1	0	1	Signature	Refer to XSD	



1.9 Error handling

The correct syntax of the whole message will be checked by the transport layer. Possible errors are described for each message.

In case of signing and syntactical errors the APDU will not be processed and a technical error response shall be sent.

In case of content and logical errors of the application protocol control information (apci) part of the APDU, an AckADU according to section 2.1.1 with apduAckCode (without an issue) listed shall be sent.

Technical checks

Messages are offered on the endpoint of the TC to be further checked and processed from there. In case of a technical error, a synchronous HTTP error is returned.

Functional messages from the system of the TC are fed back asynchronously via the ACK message. See: 2.1.1 Specification 'AckADU'.

The technical checks in the process are handled first and will be returned synchronous as a HTTP response:

- HTTP 200 for successful received.
- HTTP 400 for e.g. problems with the signing, authentication or XSD-scheme.
- HTTP 500 for internal server errors.

Some of the errors will be returned in the format of the ACK message.

The following technical checks will be done before accepting an incoming message.

Check	In case of an error
Checking the client certificate on expiration	HTTP400
Checking the client certificate on revocation	HTTP400
Checking the client certificate on trusted root certificate	HTTP400
Checking if the client certificate belongs to the registered service provider	HTTP400
Checking the signing certificate on expiration	ACK-response
Checking the signing certificate on revocation	ACK-response
Checking the signing certificate on trusted root certificate	ACK-response
Checking if the signing certificate belongs to the registered service provider	HTTP400
Checking the signature and hash of the message <i>Please note: xmldsig signature checking is used instead of the standard ISO signing.</i>	HTTP400
XSD-scheme validation	HTTP400
Check on "unique message id" (to prevent duplication)	HTTP400



2 Interactions and messages

This chapter contains a detailed description of messages for each interaction. Validation rules, timing parameters and specific requirements for each interaction are also described.



2.1 General

The messages AckADU and RequestADU are used in several interactions.

An AckADU is generally used as a response to an ADU transmission.

A RequestADU is used by TC to ask TSP to provide certain information in an ADU-message (TollDeclarationADU, ProvideUserDetailsADU).

2.1.1 Specification 'AckADU'

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	ackAdus		
22	1..n	3	ackAdu		
23	1	4	apduIdentifier	unsignedLong	
24	1	4	apduAckCode	unsignedByte	
25	0	4	apduAckText	String 1024	
26	0..n	4	issues		
27	1	5	sequence		
28	0	6	issueAduIdentifier	unsignedLong	
29	0	6	issueLocation	String 512	
30	0	6	issueContent	String 1024	
31	1	6	issueCode	unsignedShort	
32	0	6	issueText	String 1024	
33	0	4	actionCode	unsignedByte	Send (0)

2.1.1.1 Specific requirements

There are some specific requirements for the exchange of an AckADU message.

- An InfoExchange shall contain only one AckADU

2.1.2 Specification 'RequestADU'

Seq	Qty	Lvl	Data item	Impl.	Value
1	1	2	RequestADUs		
2	1	3	<requestType>*		
3	1..n	4	<requestParameters>*		
4	1	4	actionCode	unsignedByte	Send (0)

* Refer to sections 2.10 and 2.11 for more details.

2.1.2.1 Specific requirements

There are some specific requirements for the exchange of an RequestADU message.

- An InfoExchange shall contain only one RequestADU



2.2 Data Exchange “Billing details”

TSP will send a Billing details message

- for each toll trip that has ended; or
- for a ‘zero km-notification’ (MSP-only)

2.2.1 Specification ‘BillingDetailsADU’

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	billingDetailsADUs		
22	1..n	3	billingDetailsADU		
23	1	4	adulIdentifier	unsignedLong	
24	1	4	tollContext		
25	1	5	countryCode	Bitstring 10	
26	1	5	providerIdentifier	unsignedShort	
27	1	4	userId		
28	0	5	pan	hexBinary 10	
29	0	5	licencePlateNumber		
30	1	6	countryCode	Bitstring 10	
31	1	6	alphabetIndicator	Token	Value: latinAlphabetNo1 (1)
32	1	6	licencePlateNumber	hexBinary	
33	0	5	obeld		
34	1	6	manufacturerId	unsignedShort	
35	1	6	equipmentObuld	hexBinary	
36	1	4	period		
37	1	5	beginOfPeriod */**	DateTime	
38	1	5	endOfPeriod */**	DateTime	
39	1	4	billingDetailsAmount		
40	1	5	paymentFeeAmount	long	
41	1	5	paymentFeeUnit	hexBinary 2	Value: eurocents (2978)
42	1	4	usage		
43	1	5	usageList		
44	1..n	6	UsageList		
45	1	7	usageListEntry		
46	1	8	forSectionedRoads		
47	1	9	howManyTimes	long	Value: 1



Seq	Qty	Lvl	Data item	Impl.	Value
48	0	9	appliedTariffTableVersion	hexBinary	
49	0	9	appliedLocalVehicleClass		
50	0	10	appliedLocalVehicleClass Id	unsignedShort	
51	0	10	appliedLocalVehicleClass Description	String	
52	1	9	appliedTimeClass		
53	0	10	appliedTimeClassId	Int2Unsigned	Value: 1
54	0	10	appliedTimeClass Description		
55	1	9	appliedUserClass	string	
56	0	10	appliedUserClassId	Int1Unsigned	Value: 1
57	0	10	appliedUserClass Description	string	
58	0	9	usageDistance		
59	1	10	distanceValue	unsignedInt	
60	1	10	distanceUnit	unsignedByte	Value: meters (2)
61	0	4	refTollDeclaration <i>Unique reference to a TollDeclaration</i>		
62	1..n	5	refTollDeclarationId		
62	1	6	issuerId		
63	1	7	countryCode	Bitstring 10	
64	1	7	providerIdentifier	unsignedShort	
65	1	6	declarationId	unsignedLong	
66	0	4	actionCode	unsignedByte	Value: Send (0)

* For a chargeable toll trip the beginOfPeriod must contain the date and time of entering the chargeable network (entering the first chargeable road section); the endOfPeriod must contain the date and time of leaving the chargeable network (meaning leaving the final chargeable road section of that trip).

** For a 'zero km-notification' (MSP only) the beginOfPeriod must be 0:00:00 of a calendar day; the endOfPeriod must be 23:59:59 for the same calendar day.

2.2.2 Response

An AckADU is sent by TC in response to an InfoExchange message containing a BillingDetailsADU that is sent by TSP. See: section 2.1.1 AckADU.


2.2.3 Validation and errors

A billingDetailsADU is functionally validated. The following errors will be returned, if validations are not successful.



#	Check	Validation	Error (if not successful)
1 BDRec.F1	userId	Is there an active whitelist entry for this service user (pan, LPN and obeld)?	Reason code 704 - User Id incorrect
2 BDRec.F2	period	- beginOfPeriod must be before endOfPeriod and - endOfPeriod may not be in the future	Reason code 705 - Period is not valid
3 BDRec.F3	PaymentFeeUnit	PaymentFeeUnit must contain value for 'Eurocents' (2978)	Reason code 706 - PaymentFee-Unit is not valid
4 BDRec.F5	DistanceUnit	DistanceUnit contains value for 'meters' (2)	Reason code 3000 - DistanceUnit is not valid
5 BDRec.F7	duplicate billingDetails	check if aduIdentifier of billing-Details is either new or duplicate	Reason code 3000 - duplicate billingDetails id
6 BDRec.F8	actionCode	actionCode must contain value 'send' (0)	Reason code 3010 - actionCode-NotSupported
7 BDRec.F9	usageList	Must contain exactly one element	Reason code 3000 - Invalid number of usage list entries
8 BDRec.F10	tollContext	Must be equal to the value of originator.providerId (apci)	Reason code 702 - Toll Charger ID is not valid

2.2.4 Sequence diagram

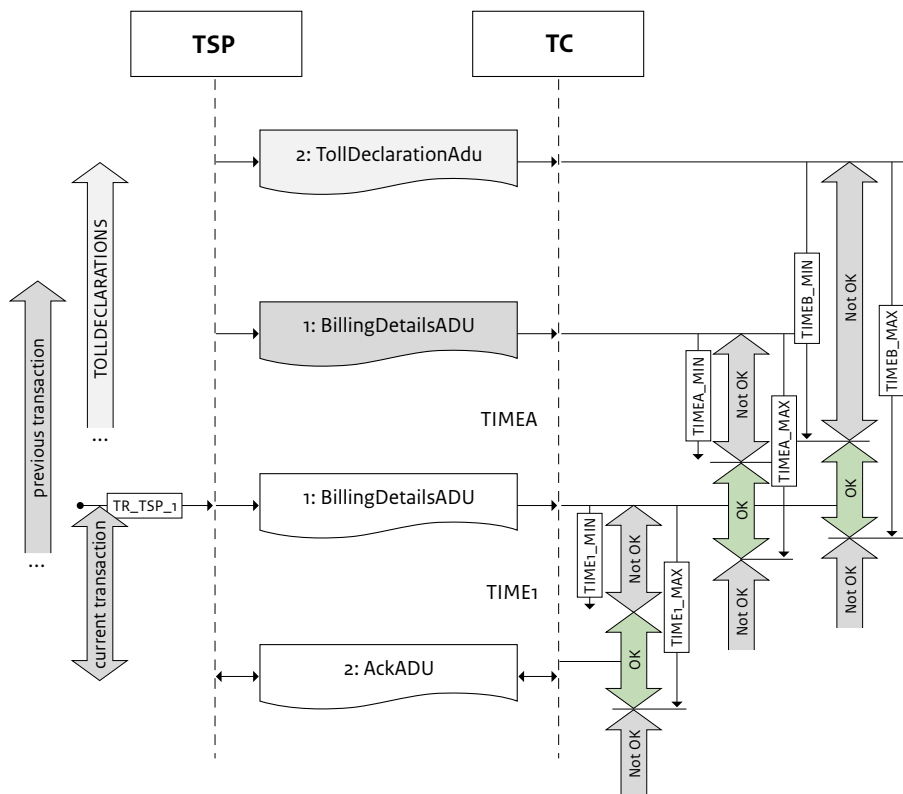

Sequence diagram of the BILLINGDETAILS_TSP transaction from EN 16986:2024.



Note: In the HGV Charge implementation of the BILLINGDETAILS_TSP transaction a BillingDetailsADU is not preceded by a TollDeclarationAdu. The TollDeclarationADU as shown in this sequence diagram must therefore be ignored. Timing parameters TIMEB_MIN and TIMEB_MAX do not apply.

2.2.5 Timing parameters

The table below contains the relevant timing parameters for BILLINGDETAILS_TSP for HGV Charge.

Timing	Value	More information
TIMEA_MIN	0	Billing details messages can be sent in parallel. Therefore TIMEA_MIN is defined as 0
TIME1_MIN	0	
TIME1_MAX	24 hours	

TIMEB_MIN and TIMEB_MAX are not applicable for the Dutch HGV Charge implementation.

2.2.6 Specific requirements

There are some specific requirements for the exchange of a Billing details message.

- An InfoExchange shall contain one or more BillingDetailsADU's.
- A BillingDetailsADU contains only the declaration of a single toll trip (or a 'zero km-notification') for a single vehicle.
- Information such as movement data is not transferred, but is kept by TSP and is available to be requested by TC in a TollDeclarationADU. For the purpose of such a request, the refTollDeclaration in the BillingDetailsADU will contain an unique reference to the movement data. See also: TollDeclarationADU.
- The transmission of a toll trip declaration by TSP is considered successful only after it has been acknowledged by TC with an AckADU containing an 'apduOK' (where no single issue/error has occurred for that specific ADU).

2.3 Data exchange "Payment announcement"

In order to transfer the owed HGV levies to the TC, the TSP needs to send a Payment announcement message. This message is used to announce payments that the TSP will be making, including a reference to the billing details for which the payment will be made.

2.3.1 Specification 'PaymentAnnouncementADU'

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	paymentAnnouncementAdus		
22	1..n	3	paymentAnnouncementAdu		
23	1	4	aduldentifier	long	
24	1	4	dueDate	DateTime	



Seq	Qty	Lvl	Data item	Impl.	Value
25	0	4	totalAmount		
26	0	5	paymentFeeAmount	long	
27	0	5	paymentFeeUnit	hexBinary 2	
28	1	4	paymentStatus	unsignedByte	Value: notYetDue (2)
29	1..n	4	referenceDetailsList		
30	1	5	referenceDetailList		
31	1..n	6	referenceDetail		
32	1	7	referencedAdulIdentifier		
33	1	8	referencedAdulIdentifier	unsignedLong	
34	1	8	referencedAduType	unsignedByte	Value: billingDetailsAdu (8)
35	1	5	Amount		
36	1	6	paymentFeeAmount	long	
37	1	6	paymentFeeUnit	hexBinary 2	Value: euro-cents (2978)
38	1	4	paymentReference	string 32	
39	1	4	actionCode	unsignedByte	Value: Send (0)

2.3.2 Response

An AckADU is sent by TC in response to an InfoExchange message containing a PaymentAnnouncementADU that is sent by TSP. See: section 2.1.1 AckADU.

2.3.3 Validation and errors


A paymentAnnouncementADU is functionally validated. The following errors will be returned, if validations are not successful.

#	Check	Validation	Error (if not successful)
1 PAAdu.F1	referenceDetailList	referenceDetailList must be present	Reason code 3000 - Reference detail list missing
2 PAAdu.F3	paymentFeeUnit	PaymentFeeUnit must contain value for 'Eurocents' (2978)	Reason code 3000 - Invalid Payment fee unit
3 PAAdu.F4	paymentStatus	paymentStatus must contain value 'notYetDue' (2)	Reason code 3000 - Invalid Payment status
4 PAAdu.F5	paymentReference	paymentReference must have a value	Reason code 3000 - Payment reference missing
5 PAAdu.F6	actionCode	actionCode must contain value 'send' (0)	Reason code 3010 - Action code not supported
7 PARec.F1	referencedAduType	referencedAduType must contain value 'billingDetailsAdu' (8)	Reason code 3000 - Invalid referenced ADU type
8 PARec.F2	referenced-AdulIdentifier	referencedAdulIdentifier must have been exchanged successfully in a BillingDetailsADU	Reason code 3000 - Unknown referenced ADU identifier



#	Check	Validation	Error (if not successful)
9 PARec.F3	aduldentifier	This aduldentifier has not yet been successfully exchanged in a PaymentAnnouncementADU	Reason code 3000 - Duplicate paymentannouncement for billingdetail
10 PARec.F4	amount	Must be equal to amount in referenced BillingDetails	Reason code 3000 - Billing amount mismatch
11 PARec.F5	totalAmount	totalAmount must equal the sum of all referenced detail amounts	Reason code 3000 - Total amount mismatch

2.3.4 Sequence diagram

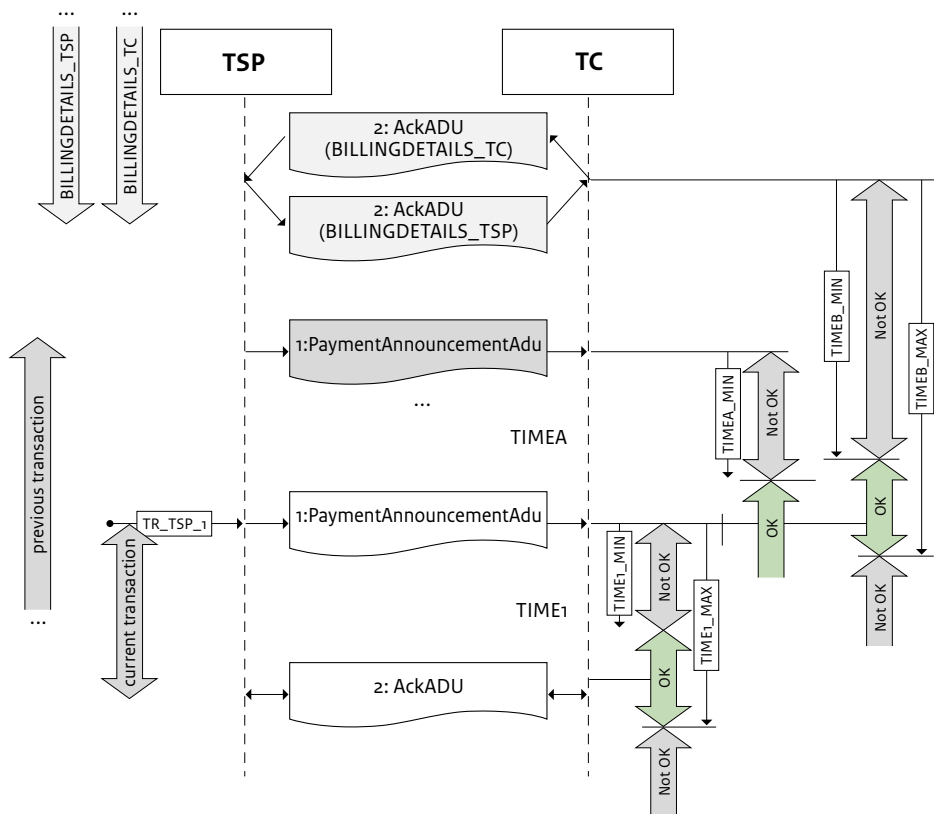

Sequence diagram of the PAYMENTANNOUNCEMENT transaction from EN 16986:2024.

2.3.5 Timing parameters

The table below contains the relevant timing parameters for PAYMENTANNOUNCEMENT for HGV Charge.

Timing	Value	More information
TIME1_MIN	0	
TIME1_MAX	24 hours	



2.3.6 Specific requirements

There are some specific requirements for the exchange of a Payment announcement message.

- An InfoExchange shall contain one or more PaymentAnnouncementADU's
- The transmission of a payment announcement by TSP is considered successful only after it has been acknowledged by TC with an AckADU (no single issue/error has occurred in that specific ADU).

2.4 Data exchange “Exception list (whitelist)”

After concluding a service agreement between TSP and holder (service user), the service user and details of its vehicle will be added to the whitelist of the TSP. Each day a full list is sent by TSP to TC containing all service users for which the TSP will accept responsibility. An incremental list update may also be used in addition to the full list.

Note: The ExceptionListADU structure will be used for the exchange of whitelists and blacklists. For reading purposes whitelist and blacklist are described separately although they share the same ADU structure.

2.4.1 Specification ‘ExceptionListADU’ (type: whitelist)

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
1	1	2	exceptionListADUs		
21	1	2	exceptionListAdus		
22	1..n	3	exceptionListAdu		
23	1	4	adultentifier	unsignedLong	
24	1	4	exceptionListVersion	unsignedLong	
25	1	4	exceptionListType	unsignedByte	Values: whiteListFull (2), whiteListIncremental (12)
26	0	4	exceptionValidityStart	DateTime	
27	1	4	exceptionListEntries		
28	0..n	5	exceptionListEntry		
29	1	6	userId		
30	0	7	pan	hexBinary 10	
31	0	7	licencePlateNumber		
32	1	8	countryCode	Bitstring 10	
33	1	8	alphabetIndicator	token	Value: latinAlphabetNo1 (1)
34	1	8	licencePlateNumber	hexBinary	
35	0	7	obeld		
36	1	8	manufacturerId	unsignedShort	



Seq	Qty	Lvl	Data item	Impl.	Value
37	1	8	equipmentObuld	hexBinary	
38	1	6	reasonCode		Value: whiteListedUser (8)
39	1..n	7	exceptionListReasonType	unsignedByte	
40	0	6	entryValidityStart	DateTime	
41	0	6	entryValidityEnd	DateTime	
42	0	6	nominalVehicleParameters		
43	1	7	vehicleClasses	string	
44	0	7	co2Classes		
45	1..n	8	co2Class		
46	1	9	co2Scheme	unsignedByte	Value: eU (1)
47	1	9	co2EmissionClass	unsignedByte	
48	0	7	euroValues		
49	1..n	8	euroValue	unsignedByte	
50	0	7	vehicleTechnicalPermissible MaxLadenMasses	string	
51	0	6	actionRequested	unsignedByte	
52	0	4	actionCode	unsignedByte	Send (0)

2.4.2 Response

An AckADU is sent by TC in response to an InfoExchange message containing a ExceptionListADU that is sent by TSP. See: section 2.1.1 AckADU.

2.4.3 Validation and errors

An exceptionListADU (whitelist) is functionally validated. The following errors will be returned, if validations are not successful.

#	Check	Validation	Error (if not successful)
1 WLAdU.T1	count (exception- ListAdu)	Must be 1	apduAckText 'Too many exceptionListAdus'
2 WLAdU.F1	exceptionListType	exceptionListType must contain value whiteListFull (2)	Reason code = 401 – exception- ListsTypeRejected
3 WLAdU.F2	exception- ValidationStart	exceptionValidationStart may not be in the future	Reason code = 405 - exception- ListsDateAndTimeRejected: date in future not allowed
4 WLAdU.F3	exceptionListVersion	exceptionListVersion must be exactly 1 version higher than last exceptionListVersion for the same exceptionListType	Reason code = 400 - exception- ListsVersionRejected
4 WLAdU.F4	actionCode	actionCode must contain value '0' (send)	Reason code = 3010 – actionCode- NotSupported



After an ExceptionListADU (whitelist) is validated successfully each whitelist entry is validated individually.


#	Check	Validation	Error (if not successful)
1 WLRec.F1	reasonCode	Value must be equal to white-ListedUser (8)	404 - The reason code in the exception list has been rejected
2 WLRec.F2	countryCode	Value must be a valid country (ISO 3166-1, Alpha-2)	Reason code = 402 - exception-ListsUserIdRejected: invalid countryCode
3 WLRec.F3	vehicleLicencePlate-Number	Value of alphabetIndicator must be latinAlphabetNo1 (1)	402 - exceptionListsUserIdRejected: invalid alphabetIndicator
4 WLRec.F4	entryValidityStart	Value may not be in the future	405 - exceptionListsDateAndTime Rejected: date in future not allowed
5 WLRec.F6	euroValues[1]	Value is present; value is 0 to 7	3000 - Required element
6 WLRec.F7	vehicleTechnical-PermissibleMax-LadenMass	Value is present and is larger than 3500	3000 - Required element 3000 – Invalid vehicleTechnicalP-ermissibleMaxLadenMass
7 WLRec.F8	co2Class	Value is present and is larger than 0	3000 - Required element
8 WLRec.F9	vehicleClasses[1]	Value is present; must contain a valid vehicleClass	3000 - Required element 3000 – Invalid vehicle class
9 BLRec.F10	entryValidityStart	Value must be between exception-ValidityStart of previous full exceptionList (type: WhitelistFull) and exceptionValidityStart of this exceptionList	405 - exceptionListsDateAndTime Rejected: not between current en previous list
10 BLRec.F11	entryValidityEnd (if present)	Value may not be in the future	405 – exceptionListsDateAndTime Rejected: date in future not allowed
		Value may not be before entryValidityStart	405 – exceptionListsDateAndTime Rejected: date before start not allowed
		Value must be between exception-ValidityStart of previous full exceptionList (type: WhitelistFull) and exceptionValidityStart of this exceptionList	405 – exceptionListsDateAndTime Rejected: not between current en previous list

If an entry validation is not successful this does not effect other entry validations as well as the general message validation.



Examples

1. An ExceptionListADU contains an exceptionValidationStart in the future. An AckADU is sent containing an 'apduNotOK' and an issue for the reason for rejecting the entire ADU.
2. An ExceptionListADU contains 1,000 entries; the general ADU values are validated successfully, but two entries cannot be validated. 998 entries are processed successfully. An AckADU is sent containing an 'apduOK' and an issue for each of the two rejected entries.
3. An ExceptionListADU contains 1,000 entries; the general ADU values are validated successfully, but all 1,000 entries cannot be validated. An AckADU is sent containing an 'apduOK' and 1,000 issues for the entry errors.

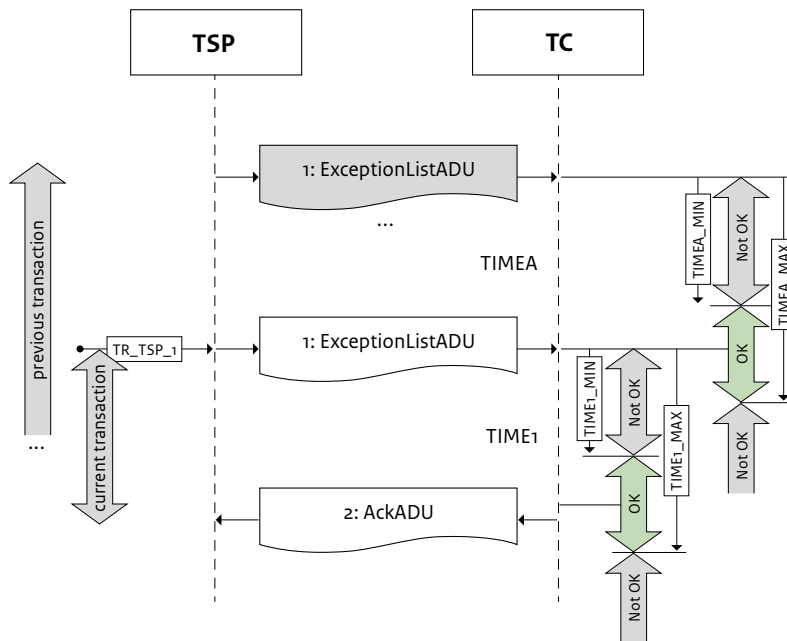

Sequence diagram of the EXCEPTIONLIST transaction from EN 16986:2024.

2.4.5 Timing parameters

The table below contains the relevant timing parameters for EXCEPTIONLIST for HGV Charge, specific per exceptionListType.

For 'whiteListFull':

Timing	Value	More information
TIMEA_MIN	20 hours	Full Whitelists must be transferred every 24 hours, therefore TIMEA_MIN is defined as 20 hours.
TIMEA_MAX	28 hours	Full Whitelists must be transferred every 24 hours, therefore TIMEA_MAX is defined as 28 hours.
TIME1_MIN	0 seconds	
TIME1_MAX	24 hours	



For 'whitelListIncremental':

Timing	Value	More information
TIMEA_MIN	0 seconds	
TIMEA_MAX	Undefined	TIMEA_MAX cannot be defined
TIME1_MIN	0 seconds	
TIME1_MAX	4 hours	

2.4.6 Specific requirements

There are specific requirements for the exchange of an Exception list (whitelist) message.

- An InfoExchange shall contain only one ExceptionListADU.
- The transmission of a exception list by TSP is considered successful only after it has been acknowledged by TC with an AckADU containing an 'apduOk'.
- One or more individual whitelist entries can be rejected. One or more issues shall be provided to TSP in the AckADU per rejected entry. All other (approved) entries have been processed successfully.

2.5 Data exchange “Exception list (blacklist)”

A blacklist contains vehicles (service users) for which the TSP will temporarily not accept responsibility. This list is used for reporting an exception for an active service user, for example, reporting a faulty OBU or a suspension following a non-payment. Each day a full list is sent by TSP to TC containing all active exceptions. An incremental list update may also be used in addition to the full list.

Note: The ExceptionListADU structure will be used for the exchange of whitelists and blacklists. For reading purposes whitelist and blacklist are described separately although they share the same ADU structure.

2.5.1 Specification ‘ExceptionListADU’ (type: blacklist)

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
20	1	2	exceptionListADUs		
21	1	2	exceptionListAdus		
22	1..n	3	exceptionListAdu		
23	1	4	adulentifier	unsignedLong	
24	1	4	exceptionListVersion	unsignedLong	
25	1	4	exceptionListType	unsignedByte	Value: blackListFull (1), blackListIncremental (11)
26	0	4	exceptionValidityStart	DateTime	
27	1	4	exceptionListEntries		



Seq	Qty	Lvl	Data item	Impl.	Value
28	0..n	5	exceptionListEntry		
29	1	6	userId		
30	0	7	pan	hexBinary 10	
31	0	7	licencePlateNumber		
32	1	8	countryCode	Bitstring 10	
33	1	8	alphabetIndicator	token	Value: latinAlphabetNo1 (1)
34	1	8	licencePlateNumber	hexBinary	
35	0	7	obeld		
36	1	8	manufacturerId	unsignedShort	
37	1	8	equipmentObuld	hexBinary	
38	1	6	reasonCode		
39	1..n	7	exceptionListReasonType	unsignedByte	Value: 0-7 or 9-19
40	0	6	entryValidityStart	DateTime	
41	0	6	entryValidityEnd	DateTime	
42	0	6	actionRequested	unsignedByte	
43	0	4	actionCode	unsignedByte	Value: Send (0), Adjust (3)

2.5.2 Response

An AckADU is sent by TC in response to an InfoExchange message containing a ExceptionListADU that is sent by TSP. See: section 2.1.1 AckADU.

2.5.3 Validation and errors

An exceptionListADU is functionally validated. If these validations are not successful, an AckADU with an 'ApduNotOk' will be returned containing one or more of the following errors.

#	Check	Validation	Error (if not successful)
1 BLAdU.T1	count (exception-ListAdu)	Must be 1	apduAckText 'Too many exceptionListAdus'
2 BLAdU.F1	exceptionListType	exceptionListType value must be blackListFull (1) or blackListIncremental (11)	Reason code = 401 – exception-ListsTypeRejected
3 BLAdU.F2	exceptionListVersion	exceptionListVersion must be exactly 1 version higher than last exceptionListVersion for the same exceptionListType	Reason code = 400 – exception-ListsVersionRejected
4 BLAdU.F3	exceptionValidity-Start	exceptionValidityStart may not be in the future	Reason code = 405 - exception-ListsDateAndTimeRejected: date in future not allowed
5 BLAdU.F4	actionCode	actionCode must Send (0) for exceptionListType = blacklistFull and Adjust (3) for exceptionList-Type blackListIncremental	Reason code = 3010 – actionCode-NotSupported




If the exceptionListADU is validated successfully, each individual list entry will be validated separately. The AckADU, with an 'ApduOk', can therefore contain issues for one or more individual list entries.

#	Check	Validation	Issue (if not successful)
1 BLRec.F1	reasonCode	Value must be equal to one of 1-7 or 11-14 or 17-19 or 30-31. <i>Other values are not allowed</i>	404 - The reason code in the exception list has been rejected
2 BLRec.F2	countryCode	Value must be a valid country (ISO 3166-1, Alpha-2)	Reason code = 402 - exception-ListsUserIdRejected: invalid countryCode
3 BLRec.F3	vehicleLicencePlate-Number	Value of alphabetIndicator must be latinAlphabetNo1 (1)	402 - exceptionListsUserIdRejected: invalid alphabetIndicator
4 BLRec.F4	entryValidityStart	Value is present. Value may not be in the future	3000 - Required element 405 - exceptionListsDateAnd-TimeRejected: date in future not allowed
5 BLRec.F5	entryValidityStart	Value must be between exception-ValidityStart of previous full exceptionList (type: blacklistFull) and exceptionValidityStart of this exceptionList	405 - exceptionListsDateAnd-TimeRejected: not between current en previous list
6 BLRec.F6	entryValidityEnd (if present)	Value may not be in the future Value may not be before entryValidityStart Value must be between exception-ValidityStart of previous full exceptionList (type: blacklistFull) and exceptionValidityStart of this exceptionList	405 - exceptionListsDateAnd-TimeRejected: date in future not allowed 405 - exceptionListsDateAnd-TimeRejected: date before start not allowed 405 - exceptionListsDateAnd-TimeRejected: not between current en previous list



2.5.4 Sequence diagram

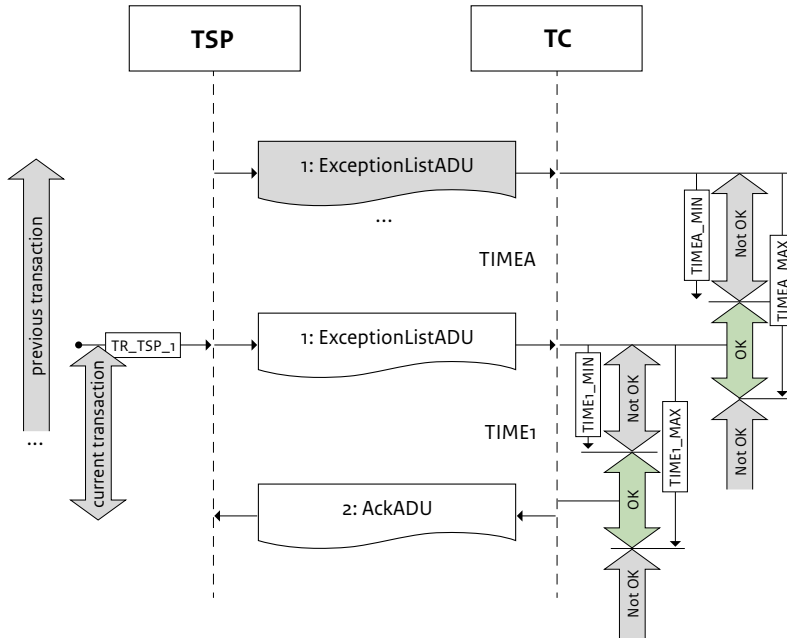

Sequence diagram of the EXCEPTIONLIST transaction from EN 16986:2024.

2.5.5 Timing parameters

The table below contains the relevant timing parameters for EXCEPTIONLISTADU for HGV Charge, specific per exceptionListType.

For 'blackListFull':

Timing	Value	More information
TIMEA_MIN	20 hours	
TIMEA_MAX	28 hours	
TIME1_MIN	0 seconds	
TIME1_MAX	24 hours	

For 'blackListIncremental':

Timing	Value	More information
TIMEA_MIN	0 seconds	
TIMEA_MAX	Undefined	TIMEA_MAX cannot be defined
TIME1_MIN	0 seconds	
TIME1_MAX	4 hours	

2.5.6 Specific requirements

There are some specific requirements for the exchange of an Exception list (blackListFull or blackListIncremental) message.

- An InfoExchange shall contain only one ExceptionListADU
- The transmission of an exception list by TSP is considered successful only after it has been acknowledged by TC with an AckADU (with an 'ApduOk'). Issues in individual entries will be allowed.
- One or more single blacklist entries can be rejected. One or more issues shall be provided to TSP in the AckADU per rejected entry. All other (approved) entries have been processed successfully.

2.6 Data exchange “Report abnormal OBE”

This exchange is used to report an abnormal detected OBE behaviour as a push message from the TC to the TSP.


A Report abnormal OBE message will have an user id containing at least a vehicle LPN or an obeld; and might also contain a Pan.

2.6.1 Specification “ReportAbnormalObeADU”

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	reportAbnormalObeAdus		
22	1..n	3	reportAbnormalObeAdu		
23	1	4	aduldentifier	unsignedLong	
24	1	4	userId		
25	0	5	pan	hexBinary 10	
26	0	5	licencePlateNumber		
27	1	6	countryCode	Bitstring 10	
28	1	6	alphabetIndicator	token	Value: latinAlphabetNo1 (1)
29	1	6	licencePlateNumber	hexBinary	
30	0	5	obeld		
31	1	6	manufacturerId	unsignedShort	
32	1	6	equipmentObuld	hexBinary	
33	1	4	dateAndTime	DateTime	
34	1..n	4	abnormalObeReason		
35	1	5	abnormalObeReasonCode	unsignedByte	
36	1	5	additionalInformation	string	
37	1	4	actionCode	unsignedByte	Value: Send (0)



2.6.2 Sequence diagram

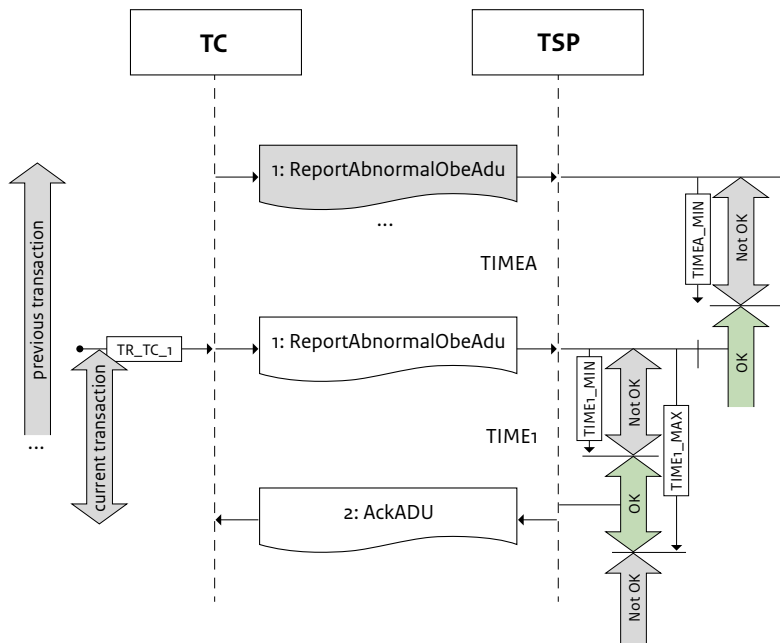

Sequence diagram of the REPORTABNORMALOBE transaction from EN 16986:2024.

2.6.3 Timing parameters

The table below contains the relevant timing parameters for REPORTABNORMALOBE for HGV Charge.

Timing	Value	More information
TIMEA_MIN	0	
TIME1_MIN	0	
TIME1_MAX	24 hours	

2.6.4 Specific requirements

There are some specific requirements for the exchange of an Report abnormal OBE message.

- An InfoExchange contains exactly one ReportAbnormalObeADU.

The transmission of a report abnormal OBE by TC is considered successful only after it has been acknowledged by TSP with an AckADU with an 'A pduOk' (where no single issue/error has occurred in any ADU).

2.7 Data exchange “Anonymous movement data”

This exchange is used to exchange raw movement data of its customer vehicles for statistical purposes. This data is used for traffic analysis. This exchange is not in the ISO 12855 standards. A description column is therefore added to the specification below.

The details of this interaction will be specified at a later time.



2.7.1 Specification “anonymousMovementData”

Seq	Qty	Lvl	Data item	Description	Impl.	Value
<i>To be specified</i>						

2.7.2 Response

To be specified.

2.7.3 Sequence diagram

To be specified.

2.7.4 Timing parameters

The table below contains the relevant timing parameters for ANONYMOUSMOVEMENTDATA for HGV Charge.

Timing	Value	Definition	More information
--------	-------	------------	------------------

2.7.5 Specific requirements

To be determined.

2.8 Data exchange “Efc Context Data”

This exchange is used to provide contextdata. The TC sends an Efc Context Data message to TSP. TSP uses context data for map matching as well as fee calculation.

2.8.1 Specification “EfcContextDataADU”

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	efcContextDataAdus		
22	1..n	3	efcContextDataAdu		
23	1	4	adultentifier	unsignedLong	
24	0	4	tollContextProperties		
25	0	5	tollContextOverview		
26	1	6	tollContext		
27	1	7	countryCode	Bitstring 10	
28	1	7	providerIdentifier	unsignedShort	
29	1	6	tollContextPartitions	string	
31	0	6	tollContextName	string	
32	1	6	tollContextOverviewVersion		



Seq	Qty	Lvl	Data item	Impl.	Value
33	1	7	version	hexBinary	
34	1	7	validFrom	DateTime	
35	0	5	tariffTable		
36	1..n	6	tariffTable		
37	1	7	applicablePartitions	string	
39	1	7	tariffs		
40	1..n	8	tariff		
41	1	9	tariffClass		
42	1	10	tariffClassId	unsignedInt	
43	1	9	chargeUnit		
44	1	10	distance		
45	1	11	distanceValue	unsignedInt	
46	1	11	distanceUnit	unsignedByte	Value = kilometers (2)
47	1	9	roundingRuleForCharge- Unit	unsignedByte	Value: No rounding (0)
48	1	9	basicFeePerChargeUnit	unsignedInt	
49	1	9	roundingRuleForFee	unsignedByte	Value: No rounding (0)
50	0	9	infrastructureFee- PerChargeUnit	unsignedInt	
51	0	9	externalCostsPerCharge- Unit		
52	0	10	airPollutionFeePerCharge- Unit	unsignedInt	
53	0	10	co2FeePerChargeUnit	unsignedInt	
54	1	7	defaultCurrency	hexBinary 2	Value: 1/10 Euro-cent (3978)
55	0	7	typeOfTariff	unsignedByte	Value: fee (1)
56	1	7	tariffTableVersion		
57	1	8	version	hexBinary	
58	1	8	validFrom	DateTime	
59	0	5	tariffClassDefinition		
60	1	6	tariffClasses		
61	1..n	7	tariffClass		
62	1	8	tariffClassId	unsignedInt	
63	0	8	tariffClassDescription	string	
64	1	8	localVehicleClasses		
65	1..n	9	localVehicleClassId	unsignedShort	



Seq	Qty	Lvl	Data item	Impl.	Value
66	0	8	locationClasses		
67	0..n	9	locationClassId	unsignedInt	
68	1	6	tariffClassDefinitionVersion		
69	1	7	version	hexBinary 10	
70	1	7	validFrom	DateTime	
71	0	5	localVehicleClassDefinition		
72	1	6	localVehicleClasses		
73	1..n	7	localVehicleClass		
74	1	8	localVehicleClassId	unsignedShort	
75	0	8	localVehicleClassDescription	string	
76	1	8	nominalVehicleParameters		
77	1	9	vehicleClasses		
78	1..n	10	vehicleClass	unsignedByte	Value = 0 (Not in use)
79	0	9	euroValues	string	
81	1	9	co2Classes		
82	1	10	co2Class		
83	1	11	co2Scheme	INT	
84	0	11	co2EmissionClass	unsignedByte	
85	0	8	ordinalVehicleParameters		
86	0	9	vehicleTrainMaximum-Weight		
87	0..n	10	vehicleTrainMaximum-WeightRange		
88	0	11	lowerLimit	unsignedShort	
89	0	11	upperLimit	unsignedShort	
90	0	6	localVehicleClassVersion		
91	1	7	version	hexBinary	
92	1	7	validFrom	DateTime	
93	0	4	tollContextType		
94	1	5	generalContextData		
95	1..n	6	tollContextPartitionOverviews		
96	1	7	tollContextPartitionOverview		
97	1	8	tollContextPartitionId	unsignedByte	
98	0	8	tollContextPartitionName	string	
99	1	8	tollContextPartitionType	unsignedByte	Value = roadSectionPricing (0)
100	1	8	operationalStatus		




Seq	Qty	Lvl	Data item	Impl.	Value
101	1	9	startsOperationAt	DateTime	
102	0	9	stopsOperationAt	DateTime	
103	1	8	timeZone	short	
104	0	8	dstInformation		
105	0	9	dstOffset	short	
106	1	9	dstStartDate	DateTime	
107	1	9	dstEndDate	DateTime	
108	1	8	tollContextPartition- Overview Version		
109	1	9	version	hexBinary	
110	1	9	validFrom	DateTime	
111	0	6	tollContextPartitionLayouts		
112	1..n	7	tollContextPartitionLayout		
113	1	8	tollContextPartitionId	unsignedByte	
114	1	8	layoutDescription		
115	1	9	sectionLayoutDescription		
116	1	10	sections		
117	1..n	11	section		
118	1	12	chargeObjectId		
119	0	13	chargeObjectOperator		
120	1	14	countryCode	Bitstring 10	
121	1	14	providerIdentifier	unsignedShort	
122	1	13	chargeObject- Designation	unsignedInt	
123	0	12	chargeObjectName	string	
124	0	12	tollPath		
125	1	13	link		
126	1	14	linkId	unsignedInt	
127	1	14	startPoint		
128	1	15	point		
129	1	16	absolutePoint Coordinates		
130	1	17	longitude	integer	
131	1	17	latitude	integer	
132	0	14	intermediatePoints		
133	1..n	15	point		



Seq	Qty	Lvl	Data item	Impl.	Value
134	1	16	absolutePoint Coordinates		
135	1	17	longitude	integer	
136	1	17	latitude	integer	
137	1	14	endPoint		
138	1	15	point		
139	1	16	absolutePoint Coordinates		
140	1	17	longitude	integer	
141	1	17	latitude	integer	
142	0	12	liabilityRules		
143	0	13	minimumUsage	unsignedShort	1 = 0.1%, 1000 = 100%
144	1	12	chargeDistance		
145	1	13	distanceValue	unsignedInt	
146	1	13	distanceUnit	unsignedByte	Value = meters (2)
147	1	12	locationClass		
148	1	13	locationClassId	unsignedInt	
149	1	8	tollContextPartitionVersion		
150	1	9	version	hexBinary	
151	1	9	validFrom	DateTime	
152	0	6	tollContextVersion		
153	1	7	version	hexBinary	
154	1	7	validFrom	DateTime	
155	0	4	actionCode	unsignedByte	Value: Send (0), Revoke (1)



2.8.2 Sequence diagram

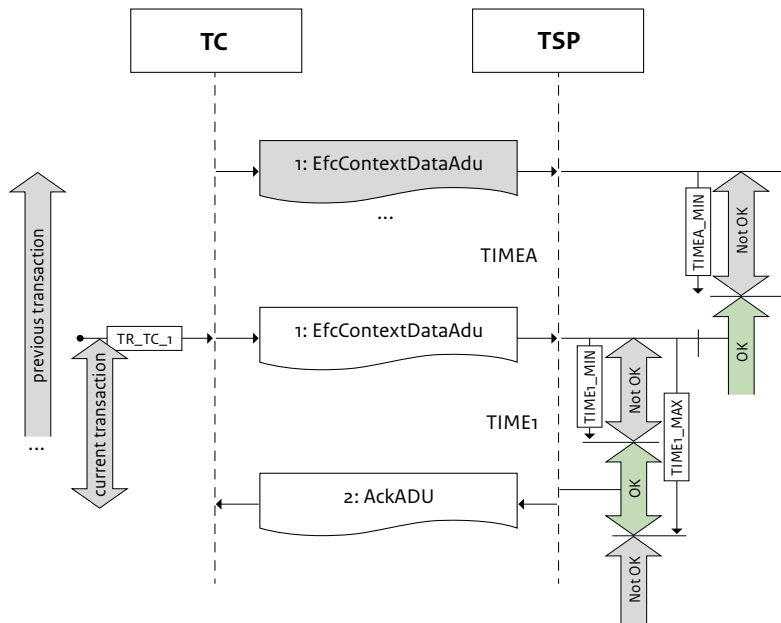

Sequence diagram of the EFCCONTEXTDATA transaction from EN 16986:2024.

2.8.3 Timing parameters

The table below contains the relevant timing parameters for EFCCONTEXTDATA for HGV Charge.

Timing	Value	More information
TR_TC_1		A TC may initiate a EFCCONTEXTDATA transaction at any time after TIMEA_MIN
TIMEA_MIN	1 minute	
TIME1_MIN	0	
TIME1_MAX	24 hours	

2.8.4 Specific requirements

There are some specific requirements for the exchange of an Efc context data message.

- An InfoExchange contains exactly one EfcContextDataADU.
- The transmission of an Efc context data message by TC is considered successful only after it has been acknowledged by TSP with an AckADU with an 'apduOK' (where no single issue/error has occurred in any ADU).

2.9 Data exchange “Trust object”

This exchange is used to exchange keys of data exchange security. A trust object message can be sent by either TC or TSP to respectively TSP or TC.

2.9.1 Specification “TrustObjectADU”

Seq	Qty	Lvl	Data item	Impl.	Value
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	trustObjectAdus		
22	1..n	3	trustObjectAdu		
23	1	4	adulentifier	unsignedLong	
24	0	4	replacedTrustObject	unsignedLong	
25	1..n	4	purposesOfTrustObject		
26	1	5	TrustObjectPurpose	unsignedByte	
27	0	4	startValidity	DateTime	
28	0	4	endValidity	DateTime	
29	1	4	trustObjectStatus	unsignedByte	
30	0	4	trustObject		
31	1	5	certificate		
32	1	7	certificateType	unsignedByte	
33	1	7	certificate	token	
34	0	4	actionCode	unsignedByte	

2.9.2 Response

An AckADU is sent by TC in response to an InfoExchange message containing a TrustObjectADU that is sent by TSP. See: section 2.1.1 AckADU.


2.9.3 Validation and errors

An trustObjectADU is functionally validated. If these validations are not successful, an AckADU with an ‘AduNotOK’ will be returned containing one or more of the following errors.

#	Check	Validation	Error (if not successful)
1 CERTAdu.F1	certificate-Type	Value of trustObjectAdu.trustObject.certificate.certificateType must be: certTspHTTPS (5) or certTspNSIG (7)	3000 - unexpected certificate type
2 CERTAdu.F2	certificate	trustObjectAdu.trustObject.certificate.certificate must be a valid certificate for this certificate type	trustObjectUnreadable (101) : invalid certificate
3 CERTAdu.F3	Expirydate	Expiry date of the certificate must be in the future <i>Note: Expiry date is part of the certificate itself</i>	trustObjectExpired (100) : certificate has expired



2.9.4 Sequence diagram – TSP to TC

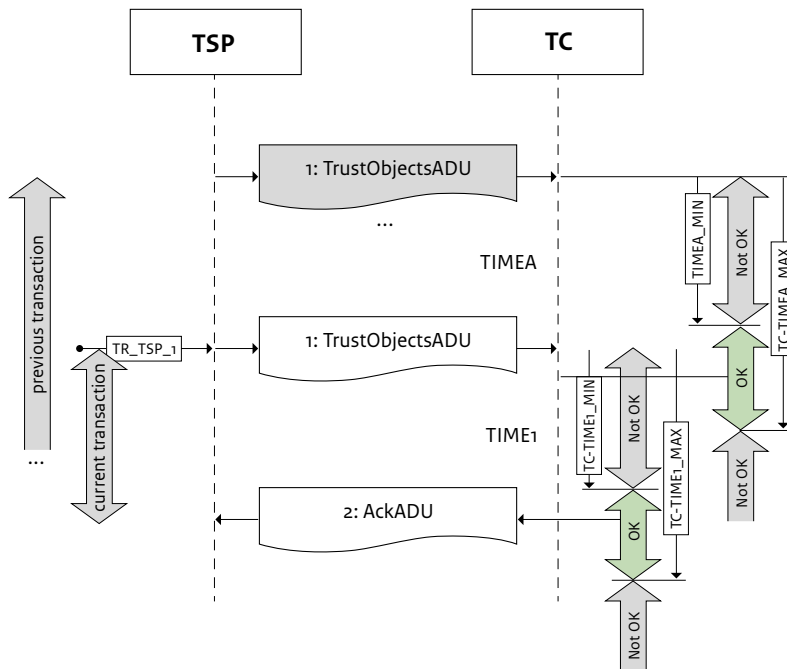


2.9.5 Timing parameters – TSP to TC

The table below contains the relevant timing parameters for TRUSTOBJECTS for HGV Charge.

Timing	Value	More information
TSP-TIMEA_MIN	0	
TSP-TIME1_MIN	0	
TSP-TIME1_MAX	24 hours	

2.9.6 Sequence diagram – TC to TSP

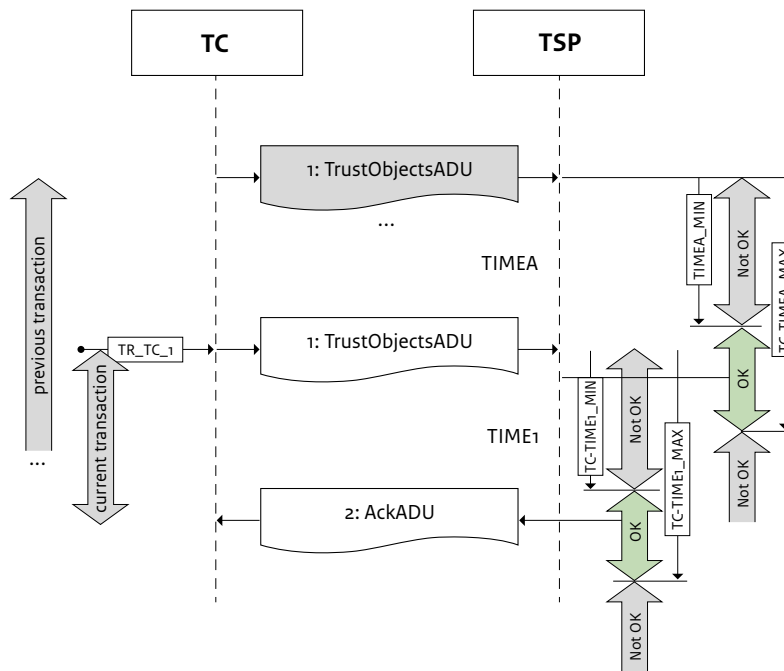

2.9.7 Timing parameters – TC to TSP

The table below contains the relevant timing parameters for TRUSTOBJECTS for HGV Charge.

Timing	Value	More information
TC-TIMEA_MIN	0	
TC-TIME1_MIN	0	
TC-TIME1_MAX	24 hours	

2.9.8 Specific requirements

There are some specific requirements for the exchange of an Trust object message.

- An InfoExchange contains exactly one TrustObjectADU.
- The transmission of a Trust objects message by either TSP or TC is considered successful only after it has been acknowledged by respectively TC or TSP with an AckADU with an 'apduOK' (where no single issue/error has occurred in any ADU).

2.10 Data exchange “Request for Toll Declaration”

The TC requests the TSP to send a Toll Declaration message to the TC. A request for a Toll Declaration can either be made for a specific toll trip or period of time.

2.10.1 Specification “RequestADU”

Seq	Qty	Lvl	Data item	Impl.	Value collection
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	requestAdu		
22	1..n	3	requestAdu		
23	1	4	tollDeclarationRequest		
24	1	5	requestedAduType	unsignedByte	Value: tollDeclarationAdu (7)
25	0	5	aduldentifer	unsignedLong	
26	0	5	userId		
27	0	6	pan	hexBinary 10	
28	0	6	contractSerialNumber	unsignedInt	
29	0	6	licencePlateNumber		
30	1	7	countryCode	Bitstring 10	
31	1	7	alphabetIndicator	token	Value: latinAlphabetNo1 (1)
32	1	7	licencePlateNumber	hexBinary	
33	0	7	obelD		
34	1	8	manufacturerId	unsignedShort	
35	1	8	equipmentObuld	hexBinary	
36	0	5	startTime	DateTime	
37	0	5	endTime	DateTime	
38	1	5	actionCode	unsignedByte	Value: Send (0)

2.10.2 Specification “TollDeclarationADU”

Seq	Qty	Lvl	Data item	Impl.	Value collection
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	tollDeclarationAdu		
22	1..n	3	tollDeclarationAdu		
23	1	4	aduldentifer	unsignedLong	
24	1	4	tollDeclarationId		
25	1	5	issuerId		
26	1	6	countryCode	Bitstring 10	



Seq	Qty	Lvl	Data item	Impl.	Value collection
27	1	6	providerIdentifier	unsignedShort	
28	1	5	declarationId	unsignedLong	
29	1..n	4	chargeReport		
	1	5	obeld		
31	1	6	manufacturerId	unsignedShort	
32	1	6	equipmentObuld	hexBinary	
33	1	5	vehicleLPNr		
34	1	6	countryCode	Bitstring 10	
35	1	6	alphabetIndicator	token	Value: latinAlphabetNo1 (1)
36	1	6	licencePlateNumber	hexBinary	
37	1	5	serviceProviderContract		
38	1	6	contractProvider		
39	1	7	countryCode	Bitstring 10	
40	1	7	providerIdentifier	unsignedShort	
41	1	6	typeOfContract	hexBinary 2	
42	1	6	contextVersion	unsignedInt	
43	1	5	reportPeriod		
44	1	6	beginOfPeriod	DateTime	
45	1	6	endOfPeriod	DateTime	
46	1	5	appliedTollContextVersion	hexBinary	
47	1	5	usageStatementList		
48	1	6	usageStatement		
49	0	7	listOfChargeObjects		
50	1..n	8	DetectedChargedObject		
51	1	9	chargeObjectId		
52	1	10	chargeObjectOperator		
53	1	11	countryCode	Bitstring 10	
54	1	11	providerIdentifier	unsignedShort	
55	1	10	chargeObjectDesignation <i>The unique identifier of a road section (chargeobject-designation from EfcContextData message)</i>		
56	1	9	timeWhenUsed	DateTime	
57	1	4	actionCode	unsignedByte	Value: Send (0)
58	1	3	geoJsonDataObject* <i>CDATA method must be used for geojson file content</i>	string Unlimited	

⁷ For more details about the geojson-file. See: 2.10.7 Specific requirements.



2.10.3 Response

An AckADU is sent by TC in response to an InfoExchange message, containing one or more TollDeclarationADU's, that is sent by TSP. See: section 2.1.1 AckADU.


2.10.4 Validation and errors

A TollDeclarationADU is functionally validated. The following errors will be returned, if validations are not successful.

#	Check	Validation	Error (if not successful)
1 TDCLApci.F1	APCI.inResponse- ToApdul	Must be present	3000 - inResponseToApdul missing
2 TDCLRec.F1	issuerId	Must be equal to apduOriginator from apci	3000 - issuerId mismatch
3 TDCLRec.F2	countryCode	Value of chargereport.vehicleLP- NR.countryCode must be a valid country (ISO 3166-1, Alpha-2)	3000 - Invalid licence plate countryCode
4 TDCLRec.F3	licencePlateNumber	Value of alphabetIndicator must be latinAlphabetNo1 (1)	3000 - exceptionListsUserId- Rejected: invalid alphabetIndicator in licencePlateNumber
5 TDCLRec.F4	geoJsonDataObject	Geojson file structure must be in conformity with 2.10.7.1 Specification "geojson" (as part of a Toll declaration)	3000 - Invalid geojson



2.10.5 Sequence diagram

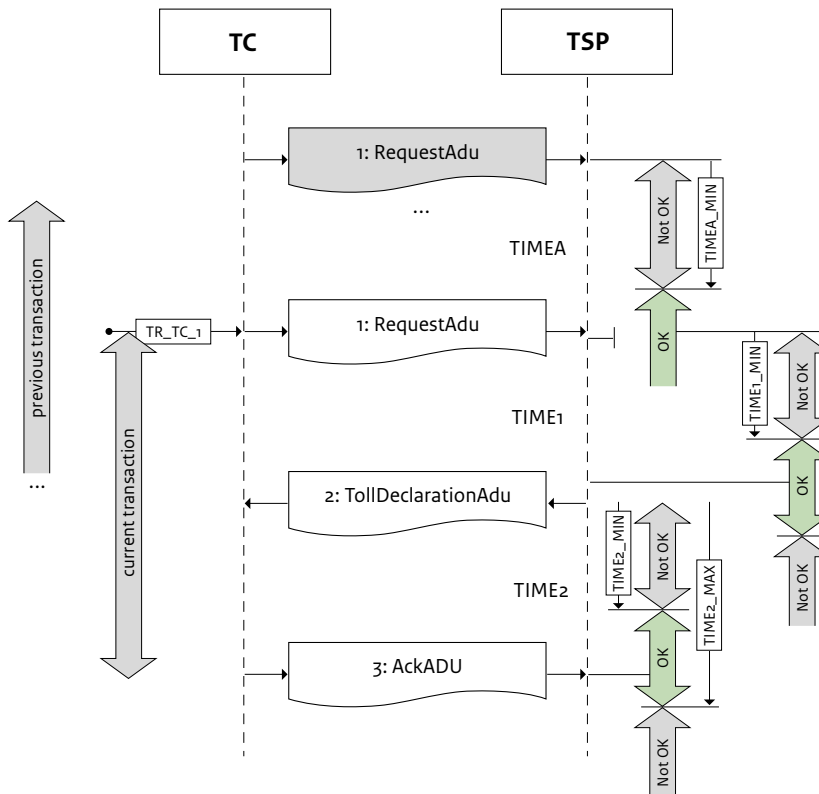

Sequence diagram of the TOLLDECLARATION transaction from EN 16986:2024.

2.10.6 Timing parameters

The table below contains the relevant timing parameters for TOLLDECLARATION for HGV Charge.

Timing	Value	More information
TIMEA_MIN	0	Multiple toll declaration interactions can be started in parallel
TIME1_MIN	0	
TIME1_MAX	1 minute	
TIME2_MIN	0	
TIME2_MAX	24 hours	

2.10.7 Specific requirements

There are some specific requirements for the exchange of a Toll Declaration message.


- An interaction starts with a request being sent by TC to TSP for a TollDeclaration. This is a top-up for the SectionAutonomous profile.
- A Toll Declaration message must contain a geojson file as an attachment in the geoJsonObject² data element. The CDATA method must be used for the content of the geoJsonObject data element.

² The geoJsonObject data element is a Top-up that is placed on equal level with the TollDeclarationADU or ADU's. This is done in order to prevent multiple sending of the same geojson file in one Toll declaration message when there are more than one TollDeclarationADU's.

- The transmission of a Toll declaration message by TC is considered successful after it has been acknowledged by TSP with an AckADU with an 'apduOK' (no single issue/error has occurred).

Geojson-file

GeoJSON is an open standard format for encoding a variety of geographic data structures, which is designed for representing simple geographical features. A geojson file can easily be viewed in a browser application, thus making it very useful to have a quick and clear insight into the movements of a service user (vehicle).

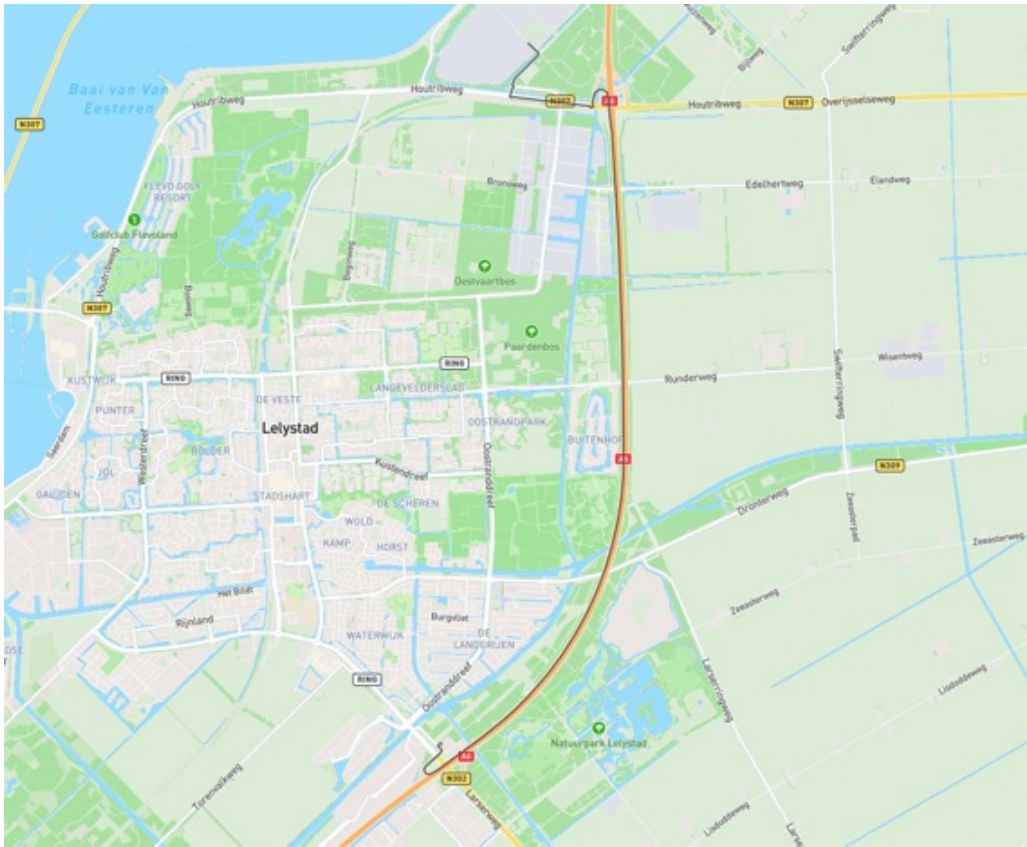

A visual representation of a geojson-file

In the table below a specification of a geojson-file is described. An example of a geojson-file can be found in Appendix A – Example of a geojson file.

Seq	Qty	Lvl	Data item	Description	Impl.	Value
1	1	1	type			Value: Feature-Collection
2	1	1	features			
3	1	2	type			Value: Feature
4	1	2	geometry	Geographical part of the road network consisting of several positions; points which form a linestring		

Seq	Qty	Lvl	Data item	Description	Impl.	Value
5	1..n	3	coordinates	A position measured in longitude and latitude		
6	1	3	type			Value: Linestring
7	1	2	properties			
8	1	3	HgvCharge	Indicator if a geographical part of the road network is map matched with a chargeable road section of the HGV Charge EfcContextData.	Boolean	
9	0..1	3	id	If HgvCharge is true, id must be present. This is the identifier of a chargeable road section or road section (link id) from the EfcContextData message. It must also match	unsigned-Long	
10	0..1	3	length	If HgvCharge is true, length must be present. This value must match the distance-Value of the charge object from the EfcContextData message.	unsigned-Long	
11	0..1	3	name	If HgvCharge is true, name must be present. This value must match the charge-ObjectName of the charge object from the EfcContextData message.	String 200	
12	1	3	startDateTime	Moment when the vehicle entered this part.	DateTime	
13	1	3	endDateTime	Moment when the vehicle left this part.	DateTime	

2.11 Data exchange “Request for User Details”

The TC requests the TSP to send an User Details message to the TC. A request for a User details message will be made for a specific user.

2.11.1 Specification “RequestADU”

Seq	Qty	Lvl	Data item	Impl.	Value collection
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	requestAdus		
22	1..n	3	requestAdu		
23	1..n	4	userDetailsRequest		
24	1	5	requestedAduType	unsignedByte	Value: ProvideUserDetails Adu (12)
25	0	5	adulIdentifier	unsignedLong	



Seq	Qty	Lvl	Data item	Impl.	Value collection
26	1	5	userId		
27	0	6	pan	hexBinary 10	
28	0	6	contractSerialNumber	unsignedInt	
29	0	6	licencePlateNumber		
30	1	7	countryCode	Bitstring 10	
31	1	7	alphabetIndicator	token	
32	1	7	licencePlateNumber	hexBinary	
33	0	7	obelD		
34	1	8	manufacturerId	unsignedShort	
35	1	8	equipmentObuld	hexBinary	
36	1	5	listOfParametersRequested		For values, see: below
37	1	5	userDetailsRequestReason	unsignedByte	
38	0	5	period		
39	1	6	beginOfPeriod	DateTime	
40	1	6	endOfPeriod	DateTime	
41	1	5	actionCode	unsignedByte	Value: Send (0)

Values for data item listOfParametersRequested

Values which are in use for the Dutch HGV Charge implementation:

- contractValidity (2),
- efcContextMark (4),
- environmentalCharacteristics (5),
- engineCharacteristics (6),
- equipmentObuld (7),
- equipmentStatus (8),
- personalAccountNumber (12),
- validityOfContract (15),
- vehicleClass (17),
- vehicleDimensions (18),
- vehicleLicencePlateNumber (19),
- userPostalAddress (26),
- preferredUserLanguage (27),
- cO2EmissionValueLoad (29),
- initialVehicleRegistrationDate (30),
- euVehicleGroup (31),
- engineDetails (32),
- cabType (33),
- euCO2EmissionClass (34)



2.11.2 Specification “ProvideUserDetailsADU”

Seq	Qty	Lvl	Data item	Impl.	Value collection
1-20			See: 1.8 Message structure – InfoExchange data items		
21	1	2	provideUserDetailsAdus		
22	1..n	3	provideUserDetailsAdu		
23	1	4	aduldentifier	unsignedLong	
24	1	4	originalUserIdRequest		
25	0	5	pan	Bitstring 10	
26	0	5	contractSerialNumber	unsignedInt	
27	0	5	licencePlateNumber		
28	1	6	countryCode	Bitstring 10	
29	1	6	alphabetIndicator	token	
30	1	6	licencePlateNumber	hexBinary	
31	0	5	obelD		
32	1	6	manufacturerId	unsignedShort	
33	1	6	equipmentObuld	hexBinary	
34	1	4	userId		
35	0	5	pan	Bitstring 10	
36	0	5	contractSerialNumber	unsignedInt	
37	0	5	licencePlateNumber		
38	1	6	countryCode	Bitstring 10	
39	1	6	alphabetIndicator	token	
40	1	6	licencePlateNumber	hexBinary	
41	0	5	obelD		
42	1	6	manufacturerId	unsignedShort	
43	1	6	equipmentObuld	hexBinary	
44	1	4	statusFlag	unsignedByte	
45	0	4	listOfUserParameters		
46	0..n	5	userParameterResponse		
47	0	6	requestedUser Parameter	unsignedByte	
48	1	6	userParameterResponse		
49	0	7	contractSerialNumber	unsignedInt	
50	0	7	contractValidity		
51	1	8	contractRestrictions	hexBinary 4	
52	1	8	contractExpiryDate		



Seq	Qty	Lvl	Data item	Impl.	Value collection
53	1	9	year	unsignedShort	
54	1	9	month	unsignedByte	
55	1	9	day	unsignedByte	
56	0	7	driverCharacteristics		
57	1	8	driverClass	unsignedByte	
58	1	8	tripPurpose	unsignedByte	
59	0	7	efcContextMark		
60	1	8	contractProvider		
61	1	9	countryCode	Bitstring 10	
62	1	9	providerIdentifier	unsignedShort	
63	1	8	typeOfContract	hexBinary 2	
64	1	8	contextVersion	unsignedByte	
65	0	7	environmentalCharacteristics		
66	1	8	euroValue	unsignedByte	
67	1	8	copValue	unsignedByte	
68	0	7	engineCharacteristics	unsignedByte	
69	0	7	equipmentObuld	hexBinary	
70	0	7	equipmentStatus	Bitstring 16	
71	0	7	paymentMeans		
72	1	8	personalAccountNumber	Hexbinary 10	
73	1	8	paymentMeans ExpiryDate		
74	1	9	year	unsignedShort	
75	1	9	month	unsignedByte	
76	1	9	day	unsignedByte	
77	1	8	paymentMeansUsageControl	hexBinary 2	
78	0	7	paymentMeansBalance		
79	0	8	positive	unsignedInt	
80	0	8	negative	unsignedInt	
81	0	7	payUnit	hexBinary 2	
82	0	7	personalAccountNumber	Hexbinary 10	
83	0	7	provider		
84	1	8	countryCode	Bitstring 10	
85	1	8	providerIdentifier	unsignedShort	
86	0	7	receiptContract		
87	1	8	sessionContractProvider		



Seq	Qty	Lvl	Data item	Impl.	Value collection
88	1	9	countryCode	Bitstring 10	
89	1	9	providerIdentifier	unsignedShort	
90	1	8	sessionTypeOfContract	hexBinary 2	
91	1	8	sessionContractSerialNumber	unsignedInt	
92	0	7	validityOfContract		
93	1	8	issuerRestrictions	hexBinary 2	
94	1	8	contractExpiryDate		
95	1	9	year	unsignedShort	
96	1	9	month	unsignedByte	
97	1	9	day	unsignedByte	
98	0	7	vehicleAuthenticator	hexBinary	
99	0	7	vehicleClass	unsignedByte	
100	0	7	vehicleDimensions		
101	1	8	vehicleLengthOverall	unsignedByte	
102	1	8	vehicleHeightOverall	unsignedByte	
103	1	8	vehicleWidthOverall	unsignedByte	
104	0	7	vehicleLicencePlateNumber		
105	1	8	countryCode	Bitstring 10	
106	1	8	alphabetIndicator	token	
107	1	8	licencePlateNumber	hexBinary	
108	0	7	vehicleIdentificationNumber		
109	1	8	vin	string	
110	1	8	fill	Bitstring 9	
111	0	7	vehicleWeightLaden	unsignedShort	
112	0	7	vehicleWeightLimits		
113	1	8	vehicleMaxLadenWeight	unsignedShort	
114	1	8	vehicleTrainMaximumWeight	unsignedShort	
115	1	8	vehicleWeightUnladen	unsignedShort	
116	0	7	vehicleAxles		
117	1	8	vehicleFirstAxleHeight	unsignedByte	
118	1	8	vehicleAxlesNumber		
119	1	9	tyreConfiguration	unsignedByte	
120	1	9	numberOfAxles		
121	1	10	trailerAxles	unsignedByte	
122	1	10	tractorAxles	unsignedByte	
123	0	7	exhaustEmissionValues		



Seq	Qty	Lvl	Data item	Impl.	Value collection
124	1	8	unitType	unsignedByte	
125	1	8	emissionCo	unsignedShort	
126	1	8	emissionHc	unsignedShort	
127	1	8	emissionNox	unsignedShort	
128	1	8	emissionHcNox	unsignedShort	
129	0	7	dieselEmissionValues		
130	1	8	particulate		
131	1	9	unitType	unsignedByte	
132	1	9	value	unsignedShort	
133	1	8	absorptionCoeff	unsignedShort	
134	0	7	userPostalAddress		
135	0	8	addresseeRoleDescriptor	string 10	
136	0	8	organisationName	string 256	
137	0	8	organisationUnit	string 256	
138	0	8	function	string 256	
139	0	8	formOfAddress	string 50	
140	0	8	qualification	string 50	
141	0	8	surname	string 256	
142	0	8	givenName	string 256	
143	0	8	deliveryServicePoint	string 256	
144	0	8	thoroughfare	string 256	
145	0	8	postCode	string 10	
146	0	8	town	string 256	
147	0	8	region	string 256	
148	0	8	country	string 256	
149	0	8	phoneInternationalDiallingCode	string 5	
150	0	8	phoneDiallingCode	string 10	
151	0	8	phoneSubscriberNumber	string 20	
152	0	8	mobileInternationalDiallingCode	string 5	
153	0	8	mobileDiallingCode	string 10	
154	0	8	mobileSubscriberNumber	string 20	
155	0	8	faxInternationalDiallingCode	string 5	
156	0	8	faxDiallingCode	string 10	
157	0	8	faxSubscriberNumber	string 20	
158	0	8	email	string 256	



Seq	Qty	Lvl	Data item	Impl.	Value collection
159	0	8	companyRegistrationNumber	string 30	
160	0	8	taxIdentifier	string 50	
161	0	8	vatIdentifier	string 30	
162	0	7	preferredUserLanguage	string	
163	0	7	equipmentLcId	hexBinary	
164	0	7	co2EmissionValueLoad	unsignedInt	
165	0	7	initialVehicleRegistrationDate		
166	1	8	year	unsignedShort	
167	1	8	month	unsignedByte	
168	1	8	day	unsignedByte	
169	0	7	euVehicleGroup		
170	1	8	mainEuVehicleGroup	unsignedByte	
171	0	8	subGroup	string 2	
172	0	7	engineDetails		
173	1	8	engineCapacity	unsignedShort	
174	1	8	enginePower	unsignedShort	
175	0	7	cabType	unsignedByte	
176	0	7	euCO2EmissionClass	unsignedByte	
177	0	6	userParameterStatus	unsignedByte	
178	1	4	actionCode	unsignedByte	



2.11.3 Response

An AckADU is sent by TC in response to an InfoExchange message, containing one or more ProvideUserDetailsADU's, that is sent by TSP. See: section 2.1.1 AckADU.

2.11.4 Validation and errors

A ProvideUserDetailsADU is functionally validated. The following errors will be returned, if validations are not successful.

#	Check	Validation	Error (if not successful)
1 PUDTApci.F1	APCI. inResponse- ToApdul	Must be present	3000 - inResponseToApdul missing
2 PUDTRec.F1	requested- User- Parameter	The data item for the requestedUserPa- rameter must be present in the UserParameterResponseDetails*	
3 PUDTRec.F2	countryCode	Value of chargereport.vehicleLPNR. countryCode must be a valid country (ISO 3166-1, Alpha-2)	3000 - Invalid licence plate countryCode
4 PUDTRec.F3	licencePlate- Number	Value of alphabetIndicator must be latinAlphabetNo1 (1)	3000 - UserDetailsUserIdRejected: invalid alphabetIndicator in licencePlateNumber


^{*)} The following requestedUserParameters are in use:

- contractValidity (2),
- efcContextMark (4),
- environmentalCharacteristics (5),
- engineCharacteristics (6),
- equipmentObuld (7),
- equipmentStatus (8),
- personalAccountNumber (12),
- validityOfContract (15),
- vehicleClass (17),
- vehicleDimensions (18),
- vehicleLicencePlateNumber (19),
- userPostalAddress (26),
- preferredUserLanguage (27),
- cO2EmissionValueLoad (29),
- initialVehicleRegistrationDate (30),
- euVehicleGroup (31),
- engineDetails (32),
- cabType (33),
- euCO2EmissionClass (34)

Other requestedUserParameters will not be used.



2.11.5 Sequence diagram

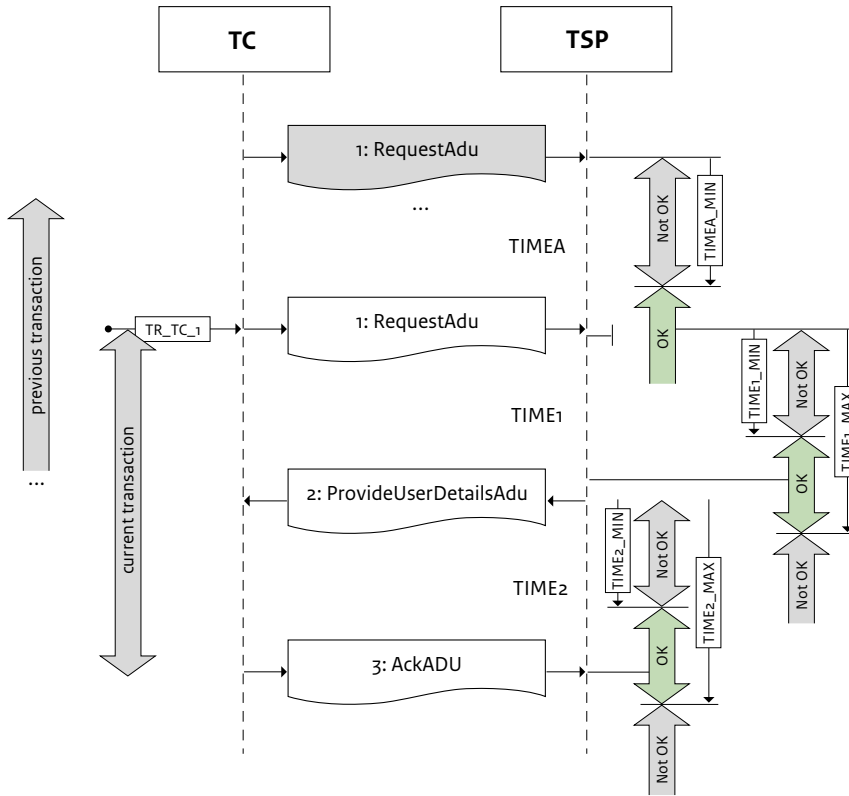

Sequence diagram of the USERDETAILS transaction from EN 16986:2024.

2.11.6 Timing parameters

The table below contains the relevant timing parameters for USERDETAILS for HGV Charge.

Timing	Value	More information
TIMEA_MIN	0	Multiple user details interactions can be started in parallel
TIME1_MIN	0	
TIME1_MAX	1 minute	
TIME2_MIN	0	
TIME2_MAX	24 hours	

2.11.7 Specific requirements

There are some specific requirements for the exchange of a Provide user details message.

- The transmission of a Provide user details message by TC is considered successful after it has been acknowledged by TSP with an AckADU with an 'apduOK' (no single issue/error has occurred).


List of definitions and abbreviations

Abbreviation	Explanation
ADU	Application Data Unit; a data structure of a specific type
APCI	Application Protocol Control Information
APDU	Application Protocol Data Unit
Chargeable road section	A road section for which a Heavy Goods Vehicle Charge is owed when it is used or driven.
Chargeable network	The network consists of chains of connected chargeable road sections. The chargeable network is entered when leaving a non-chargeable road section and entering a chargeable road section. The chargeable network is exited when driving on a chargeable road section is followed by driving on a non-chargeable road section.
EETS	European Electronic Toll Service; an EETS provider is a Toll Service Provider.
EFC	Electronic Fee Collection
HGV Charge	Heavy Goods Vehicle Charge
LPN	License plate number
MSP	Main Service Provider; the MSP is a Toll Service Provider
OBE	On Board Equipment
Pan	Personal account number
RDW	The Dutch Vehicle Authority; the Toll Charger for the HGV Charge
TC	Toll Charger
Toll trip	A toll trip is a contiguous series of road sections starting with the first road section when a vehicle enters the chargeable road network and ends with: <ul style="list-style-type: none"> • the road section where the vehicle leaves the chargeable road network; • the road section where a new version of Efc Context Data comes into effect; • the road section where the status of the OBE is changed to a NoGo status (ISO 12813:213); or • the road section that has been registered 72 hours after the start of the toll trip.
TSP	Toll Service Provider
SU	Service user. User of a toll service that has concluded a service agreement for its vehicle with a toll service provider. A service user (and its vehicle) is identified by the unique combination of pan, LPN and Obe id.
Vrachtwagenheffing (VWH)	Heavy Goods Vehicle Charge (HGV Charge)
Zero-km notification	A Billing details message containing 0 (zero) chargeable kilometers, indicating a vehicle has driven on the Dutch road network without entering the chargeable network.



Annex A - Example of a geojson file

This appendix contains an example of geojson file content. This content should be the result of the map matching process. It contains movement data of the vehicle of a service user.

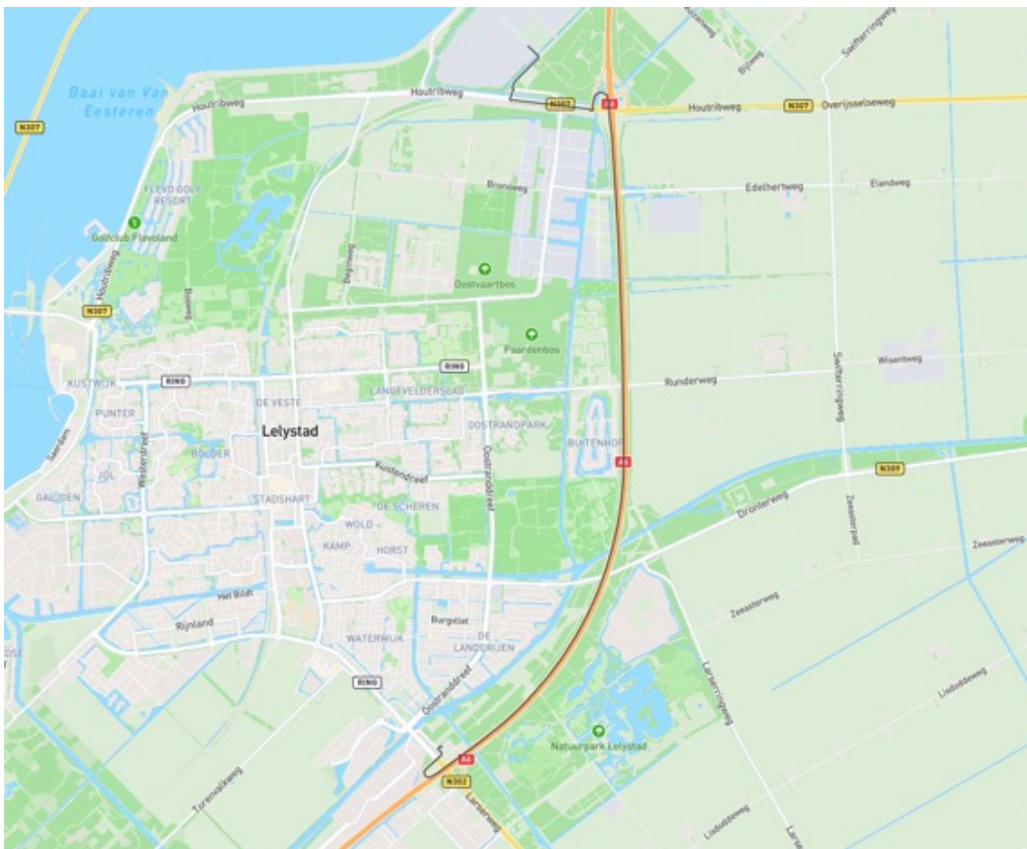

Visual representation of the geojson-file

It contains eight features:

- Six features represent chargeable road sections that have been identified as a result of the map matching process.
- The two other features represent the movements of the vehicle before and after entering the chargeable network.

The chargeable road sections are uniquely identified:

- id: 600138412 (name: Lelystad-Noord 11)
- id: 600138942 (name: Lelystad-Noord 11)
- id: 600138410 (name: Rijksweg A6)
- id: 600137671 (name: Rijksweg A6)
- id: 325398053 (name: Lelystad 10)
- id: 325398052 (name: Lelystad 10)

CDATA method

The data in geojson file obviously is not formatted as an XML, but as a JSON. This data must be inserted into the geojsonDataObject of a TollDeclaration message. In order for the data to be read correctly, the CDATA method must be used for the content of the geojsonDataObject data element

The visual representation in this appendix is generated from the data in the example below.

```
{
  "features": [
    {
      "geometry": {
        "coordinates": [
          [
            [5.50139135882043, 52.481239757167],
            [5.50196623310109, 52.4815341673705],
            [5.50238432348726, 52.4818007262613],
            [5.50244311744788, 52.4819757789822],
            [5.50233859485135, 52.4821428741114],
            [5.50180944920666, 52.4824372782718],
            [5.50186171050453, 52.4824810408837],
            [5.50228633355346, 52.4827237236713],
            [5.5025541727064, 52.4825645875686],
            [5.50139135882043, 52.481239757167]
          ]
        ]
      },
      "type": "LineString",
      "properties": {
        "endDateTime": "2023-10-01T18:28:42Z",
        "HgvCharge": false,
        "startDateTime": "2023-10-01T18:25:43Z",
        "type": "Feature",
        "geometry": {
          "coordinates": [
            [
              [5.530814, 52.54707],
              [5.530855, 52.546892],
              [5.530889, 52.546734],
              [5.53105, 52.545804],
              [5.531156, 52.545656],
              [5.530814, 52.54707],
              [5.530814, 52.54707]
            ]
          ]
        },
        "properties": {
          "endDateTime": "2023-10-01T18:29:03Z",
          "HgvCharge": true,
          "id": "600138412",
          "length": 159.805705968478,
          "name": "Lelystad-Noord 11",
          "startDateTime": "2023-10-01T18:28:42Z",
          "type": "Feature",
          "geometry": {
            "coordinates": [
              [
                [5.527952, 52.548509],
                [5.528027, 52.54877],
                [5.528239, 52.549335],
                [5.528389, 52.549523],
                [5.528506, 52.549621],
                [5.52875, 52.549735],
                [5.529102, 52.549825],
                [5.529463, 52.549835],
                [5.529815, 52.549775],
                [5.530041, 52.549689],
                [5.530337, 52.549517],
                [5.530489, 52.549259],
                [5.530553, 52.548886],
                [5.530687, 52.54779],
                [5.530814, 52.54707],
                [5.530814, 52.54707]
              ]
            ]
          },
          "properties": {
            "endDateTime": "2023-10-01T18:29:57Z",
            "HgvCharge": true,
            "id": "600138942",
            "length": 547.608550341747,
            "name": "Lelystad-Noord 11",
            "startDateTime": "2023-10-01T18:29:03Z",
            "type": "Feature",
            "geometry": {
              "coordinates": [
                [
                  [5.531156, 52.545656],
                  [5.531308, 52.544401],
                  [5.531475, 52.542958],
                  [5.531623, 52.541623],
                  [5.531773, 52.540197],
                  [5.531904, 52.538877],
                  [5.532034, 52.537485],
                  [5.5322, 52.535607],
                  [5.532281, 52.534627],
                  [5.532366, 52.533542],
                  [5.532447, 52.532441],
                  [5.53247, 52.532082],
                  [5.532549, 52.53068],
                  [5.53256, 52.5305],
                  [5.532619, 52.529782],
                  [5.53264, 52.529504],
                  [5.532696, 52.528606],
                  [5.532782, 52.527077],
                  [5.532837, 52.526006],
                  [5.532864, 52.525467],
                  [5.532938, 52.523772],
                  [5.532998, 52.522216],
                  [5.533034, 52.521138],
                  [5.533081, 52.519473],
                  [5.533119, 52.517791],
                  [5.533138, 52.516715],
                  [5.533162, 52.514962],
                  [5.533173, 52.512945],
                  [5.533172, 52.511965],
                  [5.533161, 52.511426],
                  [5.533147, 52.511067],
                  [5.533127, 52.510707],
                  [5.533108, 52.510435],
                  [5.533066, 52.509957],
                  [5.533048, 52.509778],
                  [5.533007, 52.509419],
                  [5.532947, 52.508972],
                  [5.532892, 52.508615],
                  [5.532831, 52.508257],
                  [5.532752, 52.507838],
                  [5.53264, 52.507304],
                  [5.532579, 52.50704],
                  [5.532492, 52.506684],
                  [5.532399, 52.506329],
                  [5.532335, 52.506094],
                  [5.532233, 52.50574],
                  [5.532125, 52.505386],
                  [5.532049, 52.505151],
                  [5.531931, 52.504799],
                  [5.53187, 52.504623],
                  [5.531743, 52.504272],
                  [5.531582, 52.503871],
                  [5.531253, 52.503088],
                  [5.531178, 52.502915],
                  [5.531023, 52.502568],
                  [5.530816, 52.50212],
                  [5.530653, 52.501774],
                  [5.530484, 52.50143],
                  [5.530396, 52.501258],
                  [5.530267, 52.501018],
                  [5.530075, 52.500678],
                  [5.529631, 52.499909],
                  [5.529224, 52.499226],
                  [5.529011, 52.498891],
                  [5.528791, 52.498557],
                  [5.528636, 52.498328],
                  [5.528404, 52.497998],
                  [5.528168, 52.497669],
                  [5.527982, 52.497414],
                  [5.527738, 52.497086],
                  [5.527487, 52.496761],
                  [5.527326, 52.496558],
                  [5.527068, 52.496235],
                  [5.526935, 52.496075],
                  [5.526643, 52.495726],
                  [5.52637, 52.495407],
                  [5.526091, 52.49509],
                  [5.525822, 52.49479],
                  [5.525679, 52.494633],
                  [5.525386, 52.494321],
                  [5.524939, 52.493856],
                  [5.524746, 52.49366],
                  [5.52444, 52.493352],
                  [5.524128, 52.493047],
                  [5.523906, 52.492835],
                  [5.523422, 52.492383],
                  [5.522934, 52.491941],
                  [5.522599, 52.491645],
                  [5.522209, 52.49131],
                  [5.522036, 52.491165],
                  [5.521688, 52.490875],
                  [5.521512, 52.490731],
                  [5.521335, 52.490587],
                  [5.520917, 52.490255],
                  [5.520555, 52.489972],
                  [5.520288, 52.489768],
                  [5.520288, 52.489768]
                ]
              ]
            },
            "properties": {
              "endDateTime": "2023-10-01T18:37:48Z",
              "HgvCharge": true,
              "id": "600138410",
              "length": 6422.33665139401,
              "name": "Rijksweg A6",
              "startDateTime": "2023-10-01T18:29:57Z",
              "type": "Feature",
              "geometry": {
                "coordinates": [
                  [
                    [5.520288, 52.489768],
                    [5.519917, 52.489489],
                    [5.519351, 52.489074],
                    [5.519048, 52.488857],
                    [5.518662, 52.488585],
                    [5.518467, 52.48845],
                    [5.517962, 52.488108],
                    [5.517362, 52.487712],
                    [5.516993, 52.487475],
                    [5.516482, 52.487153],
                    [5.51586, 52.48677],
                    [5.515506, 52.486556],
                    [5.515097, 52.486314],
                    [5.514668, 52.486068],
                    [5.514237, 52.485823],
                    [5.513832, 52.485599],
                    [5.513612, 52.485479],
                    [5.513127, 52.485219],
                    [5.512682, 52.484984],
                    [5.512266, 52.484767],
                    [5.51204, 52.484652],
                    [5.511456, 52.484359],
                    [5.510768, 52.484022],
                    [5.510273, 52.483783],
                    [5.509809, 52.483562],
                    [5.509809, 52.483562]
                  ]
                ]
              }
            }
          }
        ]
      }
    ]
  ]
}
```



```

[5.509173, 52.483264], [5.508703, 52.483048], [5.50823, 52.482834], [5.502673, 52.480344], [5.501991,
52.480035]], "type": "LineString", "properties": {"endTime": "2023-10-01T18:40:01Z", "HgvCharge":
true, "id": 600137671, "length": 1654.47009280056, "name": "Rijksweg A6", "startTime":
"2023-10-01T18:37:48Z"}, {"type": "Feature", {"geometry": {"coordinates": [[5.501991, 52.480035],
[5.501585, 52.479929], [5.501217, 52.479779], [5.50097, 52.479681], [5.500845, 52.479633], [5.500781,
52.479611], [5.50066, 52.479573]], "type": "LineString", "properties": {"endTime":
"2023-10-01T18:40:11Z", "HgvCharge": true, "id": 325398053, "length": 104.352482884618, "name":
"Lelystad 10", "startTime": "2023-10-01T18:40:01Z"}, {"type": "Feature", {"geometry": {"coordinates":
[[5.50066, 52.479573], [5.500592, 52.479555], [5.500523, 52.479539], [5.500417, 52.479524], [5.500345,
52.479518], [5.500231, 52.479515], [5.500159, 52.479519], [5.500086, 52.479528], [5.500015, 52.47954],
[5.499936, 52.47956], [5.499873, 52.479582], [5.499812, 52.479608], [5.49975, 52.47964], [5.499699,
52.479672], [5.499653, 52.479707], [5.499615, 52.479741], [5.49958, 52.47978], [5.499548, 52.479831],
[5.499529, 52.479875], [5.499514, 52.479936], [5.499511, 52.47998], [5.499522, 52.480049], [5.499539,
52.480093], [5.499564, 52.480141], [5.499591, 52.480182], [5.499624, 52.480222], [5.499677, 52.480269],
[5.499722, 52.480304], [5.499772, 52.480337], [5.499975, 52.480457], [5.500137, 52.480549], [5.500393,
52.480689], [5.501099, 52.481066], [5.501394, 52.481235]], "type": "LineString", "properties": {"endTime":
"2023-10-01T18:40:57Z", "HgvCharge": true, "id": 325398052, "length": 302.123917041746, "name":
"Lelystad 10", "startTime": "2023-10-01T18:40:11Z"}, {"type": "Feature", {"geometry": {"coordinates":
[[5.51698320890958, 52.5546344903841], [5.51728954643585, 52.5544625626869], [5.51882123406997,
52.5535456035908], [5.51883301628189, 52.5534739653544], [5.518809451858, 52.553402327001],
[5.51501557941063, 52.5510955095069], [5.51467038896436, 52.5507907931857], [5.51445830913795,
52.5505185501746], [5.51437583365004, 52.550303620289], [5.51445830913795, 52.5502104836784],
[5.51461147790036, 52.5500743605839], [5.51436405143667, 52.5498379352587], [5.51425801152351,
52.5496236020397], [5.51412840718635, 52.5493149292565], [5.51393989178527, 52.5491931324434],
[5.51402236727316, 52.5490426770901], [5.51429335816215, 52.5489925251911], [5.51454078462584,
52.5490570061937], [5.52214031173258, 52.5485053323314], [5.52717133512473, 52.5481471038931],
[5.52743054380034, 52.5480897862627], [5.52759549477616, 52.5479679860495], [5.52780757460255,
52.5479751507773], [5.52801965442896, 52.5480467979905], [5.52805500106624, 52.5482044214487],
[5.5279371789411, 52.5483405503428], [5.5279136145158, 52.5484336909223], [5.52794896115446,
52.5485196666659]], "type": "LineString", "properties": {"endTime": "2023-10-01T18:42:33Z",
"HgvCharge": false, "startTime": "2023-10-01T18:40:57Z"}, {"type": "Feature"}], "type":
"FeatureCollection"}

```



This is a publication of:

The Ministry of Infrastructure and Water Management

Postbus 20901
2500 EX The Hague

May 2024